


LEGEND	
POPULATED PLACES	ANCHORAGE
Over 12,000	JUNEAU
5,000 to 12,000	SEWARD
1,000 to 5,000	Skagway
500 to 1,000	Sterling
125 to 500	Haines
Less than 125	
ROADS	
Hard surface, heavy duty road	3 LANE(S) LANES
More than two lanes wide	
Two lanes wide	
Hard surface, medium duty road	2 LANE(S) LANES
More than two lanes wide	
Two lanes wide	
Improved light duty road	
Unimproved dirt road; Trail	
Route marker: Federal; State	
RAILROADS	
Normal gauge	
Narrow gauge	
BOUNDARIES	
International	
Park or reservation	
Horizontal control point	
Spot elevation in feet: Checked, Unchecked	
Power line	
Mine: Mine prospect; Mine shaft; Mine tunnel	
Landmarks: School; Church; Other	
Landing area	
Seaplane airport	
Seaplane anchorage	
Glacier	
Glacial moraine	
Woods: brushwood	
Scrub	
Land subject to inundation	
Mine tailings	
Depth curve in feet	
Limit of danger; Reef	
Wrecks: Sunken; Exposed	
Rocks: Sunken; Awash	
Foreshore flat	
Intermittent or dry stream	
Marsh or swamp	

Q501
Edition 2-AMS, First Printing
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1963 from Alaska 1:250,000, USGS, Black River, 1956. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1956. Control by USGS, USCGS and International Boundary Commission. Map not field checked.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 32°00' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 34°10' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY.
USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

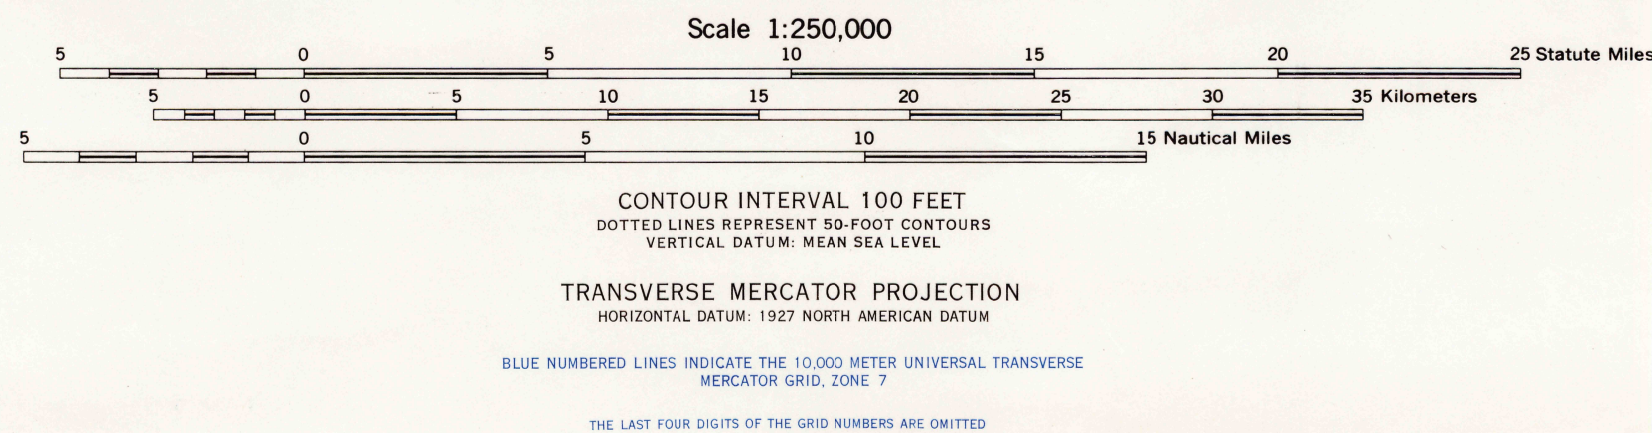

SX 8-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION	
CE	DE
CD	DD
TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS	
1. Read letters identifying 100,000 meter square in which the point lies.	
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.	
3. Locate first HORIZONTAL grid line to point; estimate tenths from grid line to point; point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.	
4. Estimate tenths from grid line to point; if reporting beyond 1000 meters, prefix Grid Zone Designation, as:	
SAMPLE REFERENCE: DD0872	

1964
Vint Sten Topo. 1:250,000
Sheet Black River, 1964
cop. 1.

BLACK RIVER, ALASKA

STOCK NO. 0501NQ785