

**LEGEND**

**POPULATED PLACES**

- Over 12,000: ANCHORAGE
- 5,000 to 12,000: JUNEAU
- 1,000 to 5,000: SEWARD
- 500 to 1,000: Skagway
- 125 to 500: Sterling
- Less than 125: Haines

**ROADS**


- Hard surface, heavy duty road
- More than two lanes wide
- Two lanes wide
- Hard surface, medium duty road
- More than two lanes wide
- Two lanes wide
- Improved light duty road
- Unimproved dirt road; Trail

**RAILROADS**


- Normal gauge
- Narrow gauge

**BOUNDARIES**

- International
- Parc or reservation
- Horizontal control point
- Spot elevation in feet: Checked, Unchecked
- Power line
- Mine; Mine prospect; Mine shaft; Mine tunnel
- Landmarks; School; Church; Other
- Landplane airport
- Landing area
- Seaplane airport
- Seaplane anchorage
- Glacier
- Glacial moraine
- Woods-brushwood
- Scrub
- Land subject to inundation
- Mine tailings
- Depth curve in feet
- Limit of danger; Reef
- Wrecks; Sunken; Exposed
- Rocks; Sunken; Awash
- Foreshore flat
- Intermittent or dry stream
- Marsh or swamp

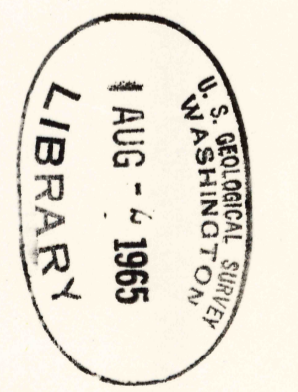

Q501  
Edition 2-AMS  
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Hughes, 1956. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1956. Topography compiled by photogrammetric methods. Aerial photography 1955. Control by USGS and USC&GS. Map not field checked.

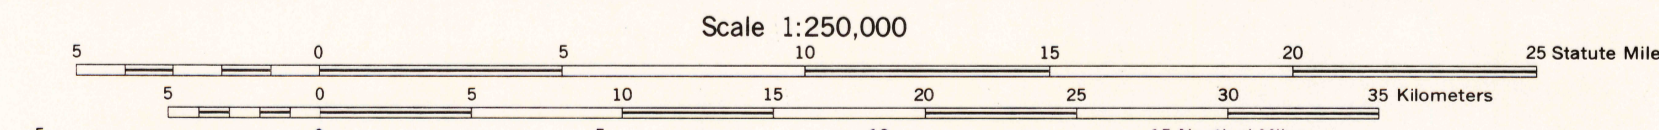

CONTOUR INTERVAL 200 FEET  
VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION  
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM  
MERCATOR GRID, ZONE 5

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 5  
REFER CORRECTIONS TO THIS MAP TO COMMAN-IN-CHIEF, ARMY MAP SERVICE, WASHINGTON, D.C.

SX 9-64 PRINTED BY ARMY MAP SERVICE CORPS OF ENGINEERS

GRID ZONE DESIGNATION: TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

100,000 M. SQUARE IDENTIFICATION

LE	ME	70	MD	3
LD	MD	40	50	6

1. Read letters identifying 100,000 meter square in which the point lies.  
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.  
3. Estimate tenths from grid line to point.  
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.  
5. Estimate tenths from grid line to point.  
6. If reading beyond 10' in any direction, prefix Grid Zone Designation, as: SWW0384

*United States Topo. 1:250,000.  
Sheet Hughes, 1964.  
cop. 1.*

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 23°45' EASTERLY FOR THE CENTER OF THE WEST SIDE TO 20°00' EASTERLY FOR THE CENTER OF THE EAST SIDE. MEAN ANNUAL CHANGE IS 0°03' WESTERLY.

STOCK NO. Q501XNQ565

HUGHES, ALASKA