


- LEGEND**
- POPULATED PLACES**
- Over 12,000
 - 5,000 to 12,000
 - 1,000 to 5,000
 - 500 to 1,000
 - 125 to 500
 - Less than 125
- ROADS**
- Hard surface, heavy duty road
 - More than two lanes wide
 - Two lanes wide
 - Hard surface, medium duty road
 - More than two lanes wide
 - Two lanes wide
 - Improved light duty road
 - Unimproved dirt road; Trail
- RAILROADS**
- Normal gauge
 - Narrow gauge
- ROUNDBARRES**
- International
 - Park or reservation
- Horizontal control point**
- Spot elevation in feet: Checked, Unchecked
 - Power line
 - Mine: Mine prospect; Mine shaft; Mine tunnel
 - Landmarks: School; Church; Other
- Landplane airport**
- Landing area
 - Seaplane airport
 - Shoreline anchorage
 - Glacier
 - Glacial moraine
 - Woods-brushwood
 - Scrub
 - Land subject to inundation
 - Mine tailings
 - Depth curve in feet
 - Limit of danger; Reef
 - Wrecks: Sunken; Exposed
 - Rocks: Sunken; Awash
 - Foreshore flat
 - Intermittent or dry stream
 - Marsh or swamp
- ANCHORAGE**
- JUNEAU
 - SEWARD
 - Skagway
 - Sterling
 - Haines

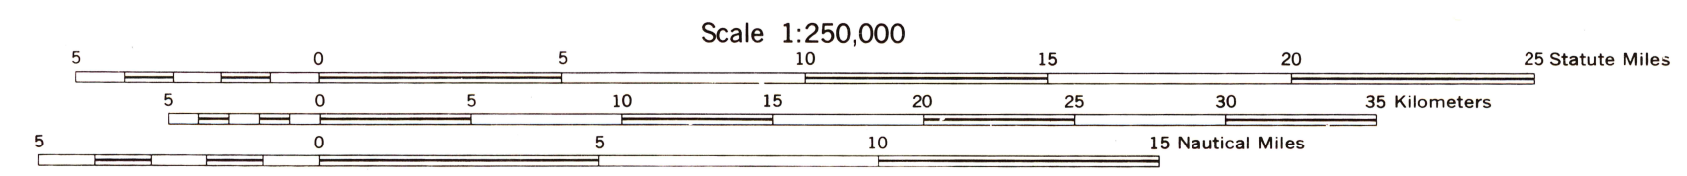

Scale 1:250,000

CONTOUR INTERVAL 200 FEET
 DOTTED LINES REPRESENT 100-FOOT CONTOURS
 VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
 HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE
 MERCATOR GRID, ZONE 5

GRID ZONE DESIGNATION: SW

10,000 M. SQUARE IDENTIFICATION

70	50	NA	60	PA
		NB	PC	PB

TO GIVE A STANDARD REFERENCE ON THIS GRID TO NEAREST 1000 METERS

SAMPLE POINT: CABIN

- Read letters identifying 100,000 meter square in which the point lies.
- Look first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself. Estimate tenths from grid line to point.
- Look first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself. Estimate tenths from grid line to point.

TO GIVE A STANDARD REFERENCE ON THIS GRID TO NEAREST 100 METERS

SAMPLE REFERENCE: NB8341

1 Reporting beyond 10' in any direction, prefix Grid Zone Designation, etc. SW8341

Q501
 Edition 2-AMS.
 Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Kantishna River, 1952. Original map compiled from U.S. Geological Survey, Alaska 1:50,000 series, 1952. Control by USGS and USCGAS. Map not field checked.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 25°12' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 27°00' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°39' WESTERLY.

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPRODUCED IF DESIRED.

SX 9-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

LIBRARY
AUG 1960

United States Topo. 1:250,000
Sheet Kantishna, cop. 1.