

LEGEND

POPULATED PLACES

- Over 12,000: ANCHORAGE
- 5,000 to 12,000: JUNEAU
- 1,000 to 5,000: SEWARD
- 500 to 1,000: Skagway
- 125 to 500: Sterling
- Less than 125: Haines

ROADS

- Hard surface, heavy duty road
- Hard surface, medium duty road
- Two lanes wide
- More than two lanes wide
- Improved light duty road
- Unimproved dirt road; Trail

RAILROADS

- Normal gauge
- Narrow gauge


BOUNDARIES

- Park or reservation
- Horizontal control point
- Spot elevation in feet: Checked; Unchecked
- Power line
- Mine: Mine prospect; Mine shaft; Mine tunnel
- Landmarks: School; Church; Other

Other features: Landplane airport, Landing area, Seaplane anchorage, Glacier, Glacial moraine, Woods-bushwood, Scrub, Land subject to inundation, Mine tailings, Depth curve in feet, Limit of danger; Reef, Wrecks: Sunken; Exposed, Rocks: Sunken; Anash, Foreshore flat, Intermittent or dry stream, Marsh or swamp.

U.S. GEOLOGICAL SURVEY
WASHINGTON, D.C.
AUG - 3 1965
LIBRARY

Q501
Edition 2-AMS, First Printing
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1963 from Alaska 1:250,000, USGS, Livengood, 1956. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1952 and 1956. Control by USGS and USC&GS. Map not field checked.

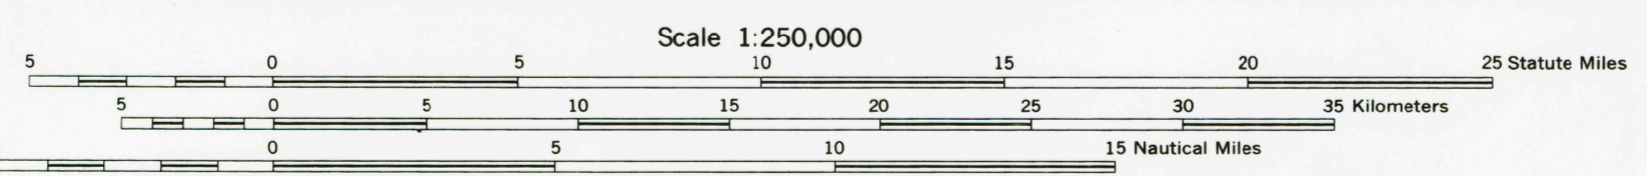

CONTOUR INTERVAL 200 FEET
DOTTED LINES REPRESENT 100-FOOT CONTOURS
VERTICAL DATUM: MEAN SEA LEVEL
TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM
BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 6
THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE OMITTED

GRID ZONE DESIGNATION: 50
190,000 M. SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which point lies.
2. Locate that VERTICAL grid line to LEFT of point and read LARGE figure showing the true value in the top or bottom margin, or on the line itself.
3. Estimate tenths from grid line to point.
4. Locate that HORIZONTAL grid line BELOW point and read LARGE figure showing the true value in the left or right margin, or on the line itself.
5. Estimate tenths from grid line to point.

EXAMPLE: 722000

SAMPLE REFERENCE: 6W4862

United States Topo. 1:250,000
Sheet Livengood, 1964.
cop. 1.

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 27°30' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 29°15' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0'00" WESTERLY.
USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.