

LEGEND

POPULATED PLACES

ANCHORAGE

JUNEAU

SEWARD

Skagway

Sterling

Haines

ROADS

Hard surface, heavy duty road

More than two lanes wide

Two lanes wide

Hard surface, medium duty road

More than two lanes wide

Two lanes wide

Improved light duty road

Unimproved dirt road; Trail

RAILROADS

Normal gauge

Narrow gauge

BOUNDRY

International

Park or reservation

Horizontal control point

Spot elevation in feet; Checked; Unchecked

Power line

Mine; Mine prospect; Mine shaft; Mine tunnel

Landmarks: School; Church; Other

Landplane airport

Landing area

Seaplane airport

Seaplane anchorage

Glacier

Glacial moraine

Woods-brushwood

Scrub

Land subject to inundation

Mine tailings

Depth curve in feet


Limit of danger; Reef

Wrecks: Sunken; Exposed

Foreshore flat


Intermittent or dry stream

Marsh or swamp

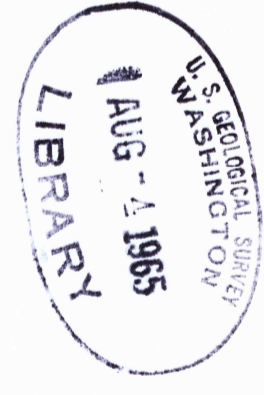

Q501
Edition 2-AMS

Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Port Alexander, 1951. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 series, 1951. Coastal hydrography compiled from USC&GS Charts 8120, 8173, 8201, 8294, 8295, 8265, 8266, and 8299 (1947-1954), and from Surveys T-8480, T-8481, and T-8433 (1951). Control by USGS and USC&GS. Map not field checked.

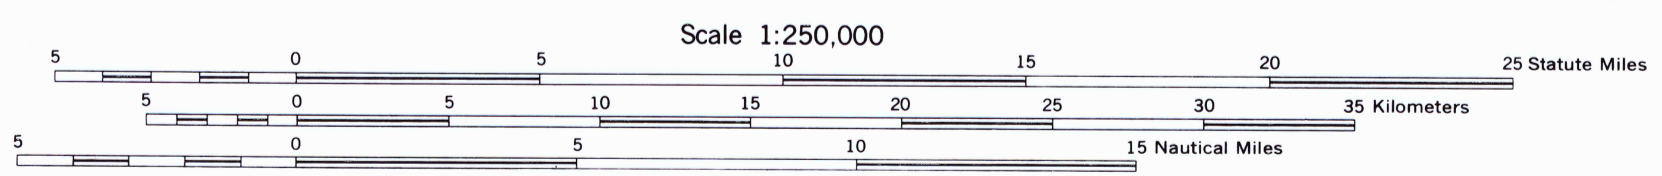

CONTOUR INTERVAL 200 FEET
VERTICAL DATUM: MEAN SEA LEVEL
TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

HYDROGRAPHIC DATUM: DEPTH CURVES IN FEET REFERRED TO MEAN LOWER WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 8

REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C.

SX 9-64 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION		TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS	
100,000 M. SQUARE IDENTIFICATION	SAMPLE POINT GAGING STATION		
MU NU	630	NT	2
MT NT	50		4
1. Read letters identifying 100,000 meter square in which the point lies. 2. Locate first vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin or on the line itself. Estimate tenths from grid line to point. 3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself. Estimate tenths from grid line to point.		SAMPLE REFERENCE Triangulation station P.T. 11, U.S.G.S. profile Grid Zone Designation, 41 NT2164 NW2164	

64
United States Topo. 1:250,000.
sheet Port Alexander. 1964
cop. 1

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 28°15' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 28°30' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0'08" WESTERLY.

STOCK NO. Q501K0811

PORT ALEXANDER, ALASKA