


LEGEND

POPULATED PLACES	ANCHORAGE
Over 12,000	JUNEAU
5,000 to 12,000	SEWARD
1,000 to 5,000	Skagway
500 to 1,000	Sterling
125 to 500	Haines
Less than 125	
ROADS	
Hard surface, heavy duty road	
More than two lanes wide	
Two lanes wide	
Hard surface, medium duty road	
More than two lanes wide	
Two lanes wide	
Improved light duty road	
Unimproved dirt road; Trail	
Route marker: Federal; State	
RAILROADS	
Normal gauge	
Narrow gauge	
BOUNDARIES	
International	
Park or reservation	
Horizontal control point	
Spot elevation in feet	
Power line	
Mine; Mine prospect; Mine shaft; Mine tunnel	
Landmarks: School; Church; Other	
Landplane airport	
Landing area	
Seaplane anchorage	
Glacier	
Glacial moraine	
Woods; brushwood	
Scrub	
Land subject to inundation	
Mine tailings	
Depth curve in feet	
Limit of danger; Reef	
Wrecks; Sunken; Exposed	
Rocks; Sunken; Awash	
Foreshore flat	
Intermittent or dry stream	
Marsh or swamp	



Q501, EDITION 2-TPC  
 Prepared by U.S. Army Topographic Command (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1969 from Alaska 1:250,000 USGS, Stepovak Bay, 1963. Original map compiled from U.S. Geological Survey, Alaska 1:63,360 Series, 1963. Coastal hydrography compiled from USCGC Charts 8700 (1965) 8802 (1965) 8851 (1953) and 8859 (1964). Control by USGS and USCGS. Map not field checked.

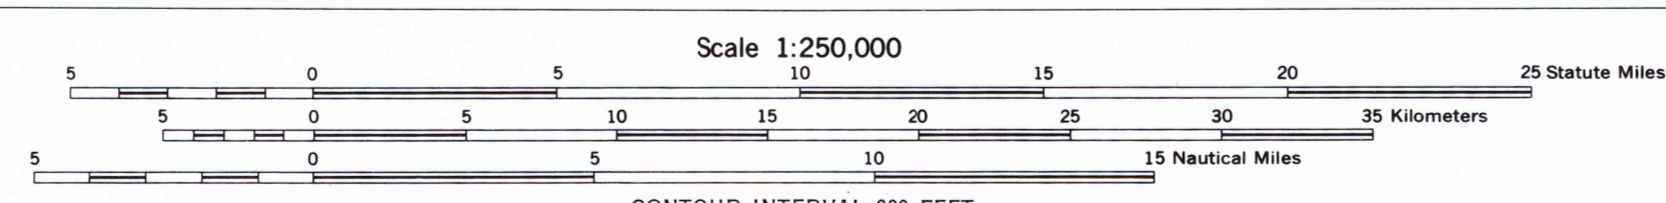

CONTOUR INTERVAL 200 FEET  
 VERTICAL DATUM: MEAN SEA LEVEL  
 TRANSVERSE MERCATOR PROJECTION  
 HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM  
 HYDROGRAPHIC DATUM: DEPTH CURVES IN FEET REFERRED TO MEAN LOWER LOW WATER  
 SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER  
 BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 4  
 1985 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 18° (330 MILES) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 18° (330 MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE.  
 USERS ARE URGED TO REFER TO CORRECTIONS AND COMMENTS FOR INCREASING THE USEFULNESS OF THIS MAP TO COMMANDING GENERAL, U.S. ARMY TOPOGRAPHIC COMMAND, WASHINGTON, D.C. 20315

GRID ZONE DESIGNATION: 4U	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
100,000 M. SQUARE IDENTIFICATION	SAMPLE POINT: CANNERY
DT ET	1. Read letters identifying 100,000 meter square in which the point lies.
DS ES	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
DR ER	3. Estimate tenths from grid line to point.
	4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.
	5. Estimate tenths from grid line to point.
	SAMPLE REFERENCE: 03995
	If reporting beyond 18" in any direction, quote Grid Zone Designation, etc. 4U03995

United States Topo. 1:250,000.  
 Sheet Stepovak Bay, 1969.  
 cop. 1.

STEPOVAK BAY, ALASKA  
 STOCK NO. Q501XNN42\*\*\*\*02