

LEGEND

POPULATED PLACES

- Over 12,000
- 5,000 to 12,000
- 1,000 to 5,000
- 500 to 1,000
- 125 to 500
- Less than 125

ANCHORAGE

- JUNEAU
- SEWARD
- Skagway
- Sterling
- Haines

ROADS

- Hard surface, heavy duty road
- More than two lanes wide
- Two lanes wide
- Hard surface, medium duty road
- More than two lanes wide
- Two lanes wide
- Improved light duty road
- Unimproved dirt road; Trail

RAILROADS

- Route marker: Federal; State
- Normal gauge
- Narrow gauge

BOUNDARIES

- International
- Park or reservation
- Horizontal control point
- Spot elevation in feet: Checked; Unchecked
- Power line
- Mine; Mine prospect; Mine shaft; Mine tunnel
- Landmarks: School; Church; Other

Landplane airport


- Landing area
- Seaplane airport
- Seaplane anchorage

Glacier


- Glacial moraine
- Woods-brushwood
- Scrub
- Land subject to inundation
- Mine tailings

Depth curve in feet

- Limit of danger; Reef
- Wrecks: Sunken; Exposed
- Rocks: Sunken; Awash
- Foreshore flat
- Intermittent or dry stream
- Marsh or swamp

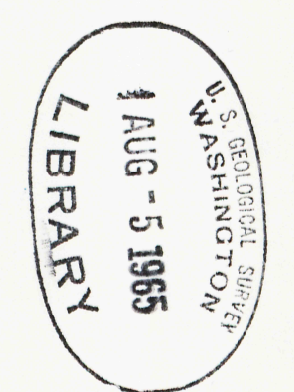

Q501
Edition 2-AMS
Prepared by the Army Map Service (GE), Corps of Engineers, U.S. Army, Washington, D.C. Copied in 1964 from Alaska 1:250,000, USGS, Umiat, 1956. Original map from Army Map Service, Alaska 1:50,000 series, 1955. Topography compiled by photogrammetric methods. Aerial photography 1956. Control by USGS, USC&GS, and USCE. Map not field checked. No areas of vegetation exist on this sheet.

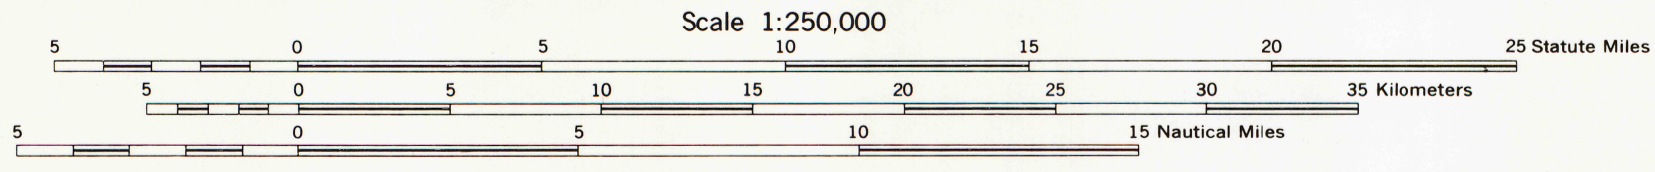

CONTOUR INTERVAL 100 FEET
VERTICAL DATUM: MEAN SEA LEVEL

TRANSVERSE MERCATOR PROJECTION
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 5

THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE OMITTED

SX 9-54 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION: 5W

100,000 M. SQUARE IDENTIFICATION:

NH	PH	70
NG	PG	10

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS:

SAMPLE POINT: VABM A KAVIK

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point.

4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point.

SAMPLE REFERENCE: NH593

If reporting beyond 10' in any direction, prefix Grid Zone Designation, etc. 5WNH593

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 27°30' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 29°45' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0'00" WESTERLY.

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

United States Topo. 1:250,000
sheet Umiat, 1964.
cop. 1.

UMIAT, ALASKA

STOCK NO. 0501NR5610