


Q701  
Edition 1-AMS (First Printing, 2 62 )

Prepared by the Army Map Service (BVMR), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1958 by photogrammetric methods. Coastal hydrography compiled from USCGS Charts 9472 and 9473, 1956. Horizontal and vertical control by USCGS and 660th Engr Bn (Base Topo). Photography partially field annotated 1955.

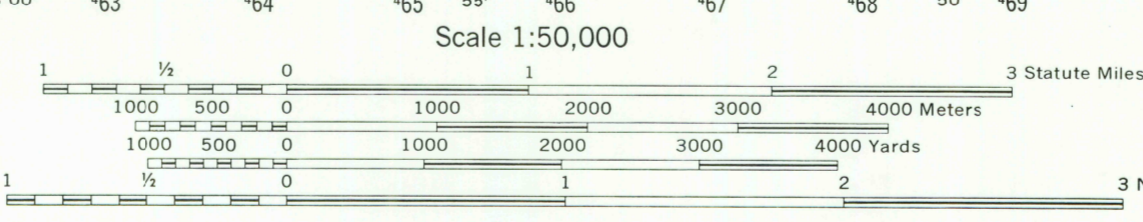

CONTOUR INTERVAL 50 FEET  
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS  
VERTICAL DATUM: APPROXIMATE MEAN SEA LEVEL  
TRANSVERSE MERCATOR PROJECTION  
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM  
HYDROGRAPHIC DATUM: SOUNDINGS IN FATHOMS REFERRED TO MEAN LOWER LOW WATER  
BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 6  
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED  
USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

LEGEND

ROADS	RAILROADS	Single track	Double track
Hard surface, heavy duty, four or more lanes wide	Standard gauge (4'8 1/2")		
Hard surface, heavy duty, Two lanes wide	Narrow gauge (3')		
Hard surface, medium duty, four or more lanes wide	In street		
Hard surface, medium duty, Two lanes wide, Three lanes wide	Horizontal control point		
Improved, light duty	Bench mark, non-monumented		
Unimproved dirt	Spot elevations in feet: Checked, Unchecked		
Trail	Bench mark, monumented		
BOUNDARIES	Glacier		
Reservation	Woods, brushwood, Scrub		
Buildings	Tundra		
School, Church	Swamp or marsh		
Mines: Vertical shaft; Horizontal shaft; Open pit	Large rapids; Large falls		
Prospect	Soundings in fathoms		
Distorted surface; Mine tailings	Depth curves in fathoms		
	Forshore fit		
	Rocks: Bare or wash; Sunken		
	Limit of danger; Reef		

GRID ZONE DESIGNATION: 6W  
100,000 M. SQUARE IDENTIFICATION

VP	7100
WN	7100

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: VABM 34

- Read letter identifying 100,000 meter square in which the point lies.
- Locate first VERTICAL grid line to LEFT of point and read LARGE figures marking the line either in the top or bottom margin, or on the line itself.
- Estimate tenths from grid line to point.
- Locate first HORIZONTAL grid line BELOW point and read LARGE figures marking the line either in the left or right margin, or on the line itself.
- Estimate tenths from grid line to point.

SAMPLE REFERENCE: VP88810  
WN98810

1960 ANNUAL MAGNETIC CHANGE IS NEGLIGIBLE

GW 2-62 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

COVERAGE DIAGRAM

INDEX TO ADJOINING SHEETS

Completion Methods

Map

Spot stereo

A. USCGS Chart 9472, 1956. (reliability good)

B. USCGS Chart 9473, 1956. (reliability good)

Aerial photography, July, 1955.

Sheet 2661 IV falls within NS 5, 6-1, Q501, 1:250,000.

FILE COPY  
OCT 4 1962  
MAP INFORMATION OFFICE

BEECHY POINT B-2, ALASKA