


Q701  
Edition 1-AMS (First Printing, 2-62)

Prepared by the Army Map Service (VABM), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1958 by photogrammetric methods. Coastal hydrography compiled from USCGS Charts 9473, 9474, dated 1956. Horizontal and vertical control by USCGS, and 660th Engr Bn (Base Topo). Photography partially field annotated 1955.

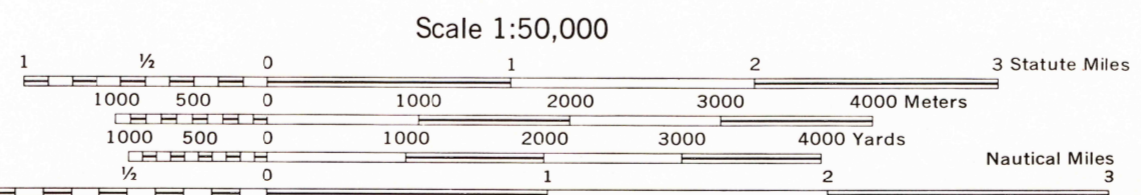

CONTOUR INTERVAL 50 FEET  
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS  
VERTICAL DATUM: APPROXIMATE MEAN SEA LEVEL  
TRANSVERSE MERCATOR PROJECTION  
HORIZONTAL DATUM: 1927 NORTH AMERICAN DATUM

HYDROGRAPHIC DATUM: SOUNDINGS IN FATHOMS REFERRED TO MEAN LOWER LOW WATER  
BLACK NUMBERED LINES INDICATE THE 1,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 6  
THE LAST THREE DIGITS OF THE GRID NUMBERS ARE OMITTED

USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

**LEGEND**

**ROAD DATA 1955**

Hard surface, heavy duty, four or more lanes wide: Standard gauge (4'3 1/2")

Hard surface, heavy duty, two lanes wide: Narrow gauge (3')

Hard surface, medium duty, four or more lanes wide: In street

Hard surface, medium duty, two lanes wide: Horizontal control point

Improved, light duty: Bench mark, non-monumented

Unimproved dirt: Spot elevations in feet: Checked; Unchecked

Trail: BM 792

**BOUNDARIES**

National: Tundra

Reservation: Woods-brushwood; Scrub

Buildings: Swamp or marsh

School; Church: Large rapids; Large falls

Mines: Vertical shaft; Horizontal shaft; Open pit: Soundings in fathoms

Prospect: Foreshore flat

Distorted surface; Mine tailings: Rocks: Bare or awash; Sunken

Limit of danger; Reef:

**GRID ZONE DESIGNATION: 6N**

100,000 M. SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 50 METERS

SAMPLE POINT: VABM 20

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate the VERTICAL grid line to LEFT of point and read LARGE figures labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point; estimate tenths from grid line to point; on the line itself.

4. Locate first HORIZONTAL grid line BELOW point and read LARGE figures labeling the line either in the left or right margin, or on the line itself.

5. Estimate tenths from grid line to point; estimate tenths from grid line to point; on the line itself.

SAMPLE REFERENCE: 6N125854

IF REPORTING BEYOND 10' IN ANY DIRECTION, PREFIX GRID ZONE DESIGNATION, AS:

6N125854

GRID CONVERGENCE 01' 17" IS NILS: FOR CENTER OF SHEET  
1" = 60' (17.77 MILS)  
1960 ANNUAL MAGNETIC CHANGE IS NEGLIGIBLE

GW 2-62 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

**COMPLETION METHOD**

Photo stereo

A. USCGS Chart 9473, 1956 (reliability good)

B. USCGS Chart 9474, 1956 (reliability good)

Aerial photographs: July 1955

**INDEX TO ADJOINING SHEETS**

2761 I 2761 IV  
2760 I 2760 IV 2760 I

Sheet 2761 III falls within NR 5, 6 & 0501, 1:250,000

FILE COPY  
OCT 4 1962  
MAP INFORMATION CENTER