



RECEIVED
OCT 3 1 2001
U.S. GEOLOGICAL SURVEY
HISTORICAL MAP ARCHIVES

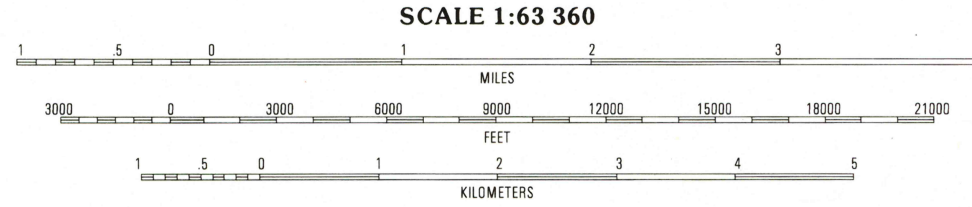

Produced by the United States Geological Survey
Topography compiled 1948. Planimetry derived from imagery taken 1993. Public Land Survey System current as of 1977. East half current as of 1999. Survey control current as of 1977. Boundaries current as of 1999. This map has not been field checked.
North American Datum of 1983 (NAD 83). Projection and 5 000-meter grid: Universal Transverse Mercator, zone 6. 5 000-meter ticks: Alaska Coordinate System of 1983 (zone 3).
North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 are obtainable from National Geodetic Survey NADCON software.
Protracted land lines are predetermined by the Bureau of Land Management, Folio S-1, Seward Meridian, CR-4 and CR-5, Copper River Meridian.



CONTOUR INTERVAL 100 FEET
SUPPLEMENTARY CONTOUR INTERVAL 50 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048



ROAD CLASSIFICATION

Primary highway hard surface	Unimproved road
Secondary highway hard surface	4 wheel drive
Light-duty road, hard or improved surface	Trails

State Route

1	2
3	4
5	6

ADJOINING QUADRANGLES