


Prepared under the direction of the President, Mississippi River Commission.
Horizontal Control by Corps of Engineers, U. S. Army, Memphis District and U.S.C.&G.S.
Vertical control by Corps of Engineers, U. S. Army, Memphis District and U.S.C.&G.S.
Descriptions, elevations and geodetic positions of bench marks may be obtained from Memphis Engineer District, Memphis, Tenn.
Topography by Corps of Engineers, U. S. Army, Memphis District, 1930-40.
Revised by Mississippi River Commission, 1933, 1935 and 1940.
Political boundaries are shown according to best available information, and are subject to change except where established by court decision.
Polyconic Projection, North American Datum.

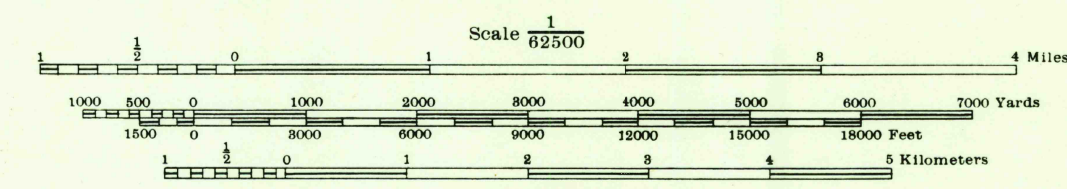

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 4-54, 101071

LEGEND

Levee	+++++	Levee mile post	LMP
Retards and dikes		Levee station	LS
Revetment		Towhead	TH
River Gage	⊕		

Contour interval 5 and 25 feet changing on the 300 foot contour.
Datum is mean gulf level at Biloxi, Mississippi. Elevations differ from mean sea level elevations as determined by the U.S. Coast and Geodetic Survey, by small fractions of a foot. Persons interested may secure elevations of bench marks as determined by the latest U. S. C. & G. S. adjustment, by applying to the U. S. Coast and Geodetic Survey.
FIVE THOUSAND YARD GRID COMPUTED FROM "GRID SYSTEM FOR PROGRESSIVE MAPS IN THE U. S." ZONE C, U. S. C. & G. S. SPECIAL PUBLICATION NO. 55

Additional copies may be procured from
The President, Mississippi River Commission,
Vicksburg, Miss. 20 cents per copy

APPROXIMATE MEAN DECLINATION 1930 ANNUAL MAGNETIC CHANGE 1" DECREASE
ROUTES USUALLY TRAVELED
HARD IMPERVIOUS SURFACES
OTHER SURFACE IMPROVEMENTS
U. S. ROUTE STATE ROUTE
Distances above mouth of St. Francis River are shown at 5 mile intervals.

