



Produced by the United States Geological Survey Topography compiled 1966. Planimetry derived from imagery taken 1966 and other sources. Public Land Survey System and survey control current as of 1968. Boundaries current as of 2000 North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 12 2 500-meter ticks: Arizona Coordinate System of 1983 (central zone) North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software Houses of worship, schools, and other labeled buildings verified 1968

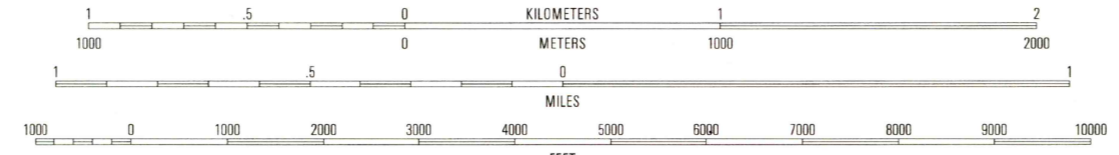

CONTOUR INTERVAL 20 FEET SUPPLEMENTARY CONTOUR INTERVAL 10 FEET NATIONAL GEODETIC VERTICAL DATUM OF 1929 TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

RECEIVED FEB 28 2002



QUADRANGLE LOCATION table with 3 columns and 3 rows.

ROAD CLASSIFICATION table with 4 columns: Primary highway, Secondary highway, Interstate Route, U.S. Route, State Route, and Light-duty road, hard or improved surface, Unimproved road.

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225 A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ADJOINING 7.5' QUADRANGLE NAMES table with 3 columns and 3 rows.

CAT MOUNTAIN, AZ 1996 NIMA 3748 II NE-SERIES V898

