



V502
Edition 1-AMS (First Printing, 6-57)
Prepared by the Army Map Service (BECE), Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1954 by photogrammetric methods. Horizontal and vertical control by USGS and USC&GS. Aerial photography 1953-1954. Photography field annotated 1954.

LEGEND

ROAD DATA 1954
Figures in red denote approximate distances in miles between stars

POPULATED PLACES


Over 500,000	LOS ANGELES	Hard surface, heavy duty
100,000 to 500,000	OMAHA	More than two lanes wide
25,000 to 100,000	GALVESTON	Two lanes wide; Federal route marker
5,000 to 25,000	Laramie	Hard surface, medium duty
1,000 to 5,000		Two lanes wide; State route marker
Less than 1,000		Improved light duty
		Unimproved dirt
		Sun Valley

RAILROADS

Standard gauge	Single track	Double or Multiple
Narrow gauge		
International		
State		
County		
Park or reservation		


LANDS & PLACES

Landplane airport	Landmark: School; Church; Other
Landing area	Spot elevation in feet
Marsh or swamp	Spot elevation in feet
Dry lake	Marsh or swamp
Intermittent or dry stream	
Woods/brushwood	
Power line	

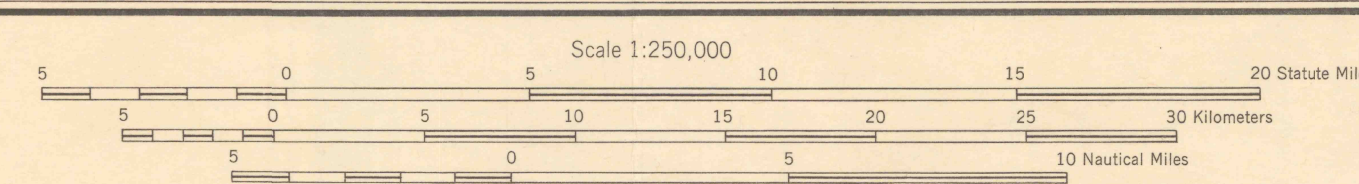

CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION


BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 12
THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE CONTINUED
THIS MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 13°00' EASTERN TO 13°00' WESTERN FOR THE CENTER OF THE SHEET
AND TO 13°00' EASTERN FOR THE CENTER OF THE EAST EDGE. NEAR ANNUAL CHANGE 0°00' WESTERLY.
USERS NOTING ERRORS OR OMISSIONS ON THIS MAP ARE URGED TO MARK HEREON AND FORWARD DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REPLACED IF DESIRED.

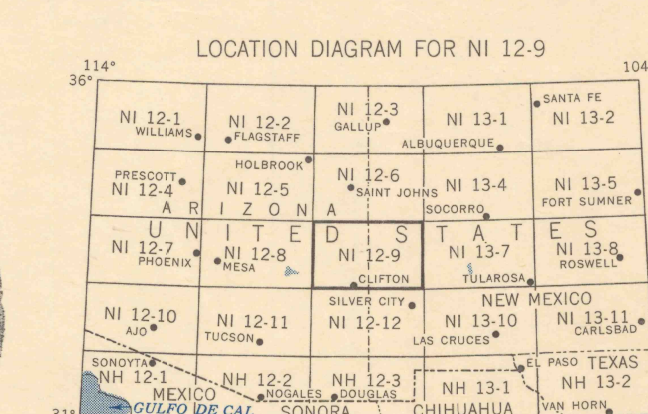

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 6-57 . 777728

GRID ZONE DESIGNATION: 12S
100,000 M. SQUARE IDENTIFICATION: WN XM YN
SAMPLE POINT - RESERVE

1. Read letters identifying 100,000 meter square in which the point lies
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either on the top or bottom margin, or on the line itself
3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either on the left or right margin, or on the line itself
4. Estimate tenths from grid line to point
5. FORM REFERENCE
6. If remaining beyond 10' in any direction, prefix Grid Zone Designation, as: 12S983

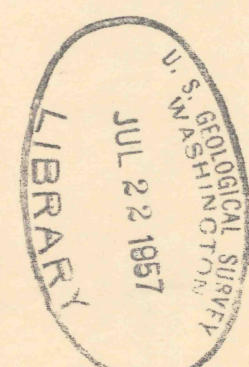

United States. Topo. 1:250,000.
sheet Clifton,
cop. 1.