



Produced by the United States Geological Survey
Control by USGS and NOS/NOAA
Compiled from imagery dated 1963. Revised from imagery dated 1992. P155 and survey control current as of 1966. Map edited 1995. Contours and land elevations have not been revised and may conflict with other content.
North American Datum of 1927 (NAD 27). Projection and blue 1000-meter ticks: Universal Transverse Mercator, zone 11 10 000-foot ticks: California Coordinate System, zone 5
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is uncheckered.

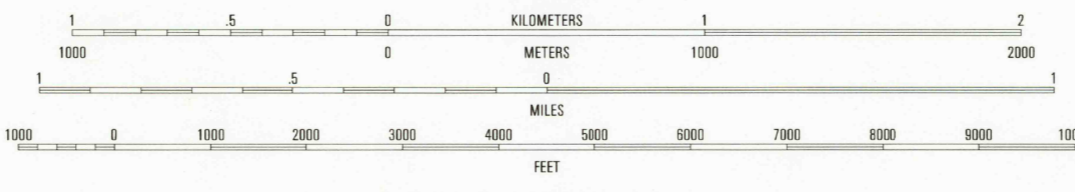

CONTOUR INTERVAL 40 FEET
SUPPLEMENTARY CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FEET TO METERS MULTIPLY BY 0.3048
TO CONVERT METERS TO FEET MULTIPLY BY 3.2808

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY
DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



1	2	3	1 Edison
2	3	4	2 Bena
3	4	5	3 Otter Peak
4	5	6	4 Arvin
5	6	7	5 Keene
6	7	8	6 Tejon Hills
7	8		7 Tejon Ranch
8			8 Cummings Mountain

ROAD CLASSIFICATION

- Primary highway: solid line
- hard surface: dashed line
- Secondary highway: dotted line
- hard surface: dash-dot line
- Unimproved road: long-dashed line
- Light-duty road, hard or improved surface: thin solid line
- Interstate Route: red shield
- U.S. Route: red rectangle
- State Route: red circle

BEAR MOUNTAIN, CA
35118-B6-TF-024
1992
DMA 2254 II NW-SERIES V895

