



V502, EDITION 6
 Prepared by the U.S. Army Topographic Command (GUSX), Washington, D.C. Compiled in 1955 from United States quadrangles, 1:24,000, 1:25,000, 1:50,000, and 1:62,500, 1922-1953; USCG's charts, 1941; Planimetry revised from aerial photographs taken 1949-50. Map field checked 1956. Revised by the U.S. Geological Survey 1969.
 Selected hydrographic data compiled from USC&GS charts. This information is not intended for navigational purposes.
 Area covered by dashed light-blue pattern is subject to controlled inundation.
 100,000-foot grids based on California coordinate system, zones 5 and 4.
 Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND
 Figures in red denote approximate distances in miles between stars


POPULATED PLACES	ROADS	RAILROADS	BOUNDARIES
Over 500,000	Primary, all-weather, hard surface	Single track	International
100,000 to 500,000	Secondary, all-weather, hard surface	Double or multiple	State
25,000 to 100,000	Light-duty, all-weather, improved surface	Standard gauge	County
5,000 to 25,000	Fair or dry weather, unimproved surface	Narrow gauge	Park or reservation
1,000 to 5,000	Fair or dry weather, unimproved surface	Standard gauge	Woods
Less than 1,000	Fair or dry weather, unimproved surface	Narrow gauge	Spot elevation in feet
	Trail	Standard gauge	
	Interchange	Narrow gauge	
	Route markers: Interstate, U.S., State	Standard gauge	
	Landmarks: School; Church; Other	Narrow gauge	
	Depth curves in feet	Standard gauge	
	Limit of danger; Reef	Narrow gauge	
	Rocky beach	Standard gauge	
	Foreshore flat	Narrow gauge	
	Intermittent or dry stream	Standard gauge	
	Marsh or swamp	Narrow gauge	

Scale 1:250,000
 0 5 10 15 20 25 30 Statute Miles
 0 5 10 15 20 25 30 Kilometers
 0 5 10 15 20 25 30 Nautical Miles

**CONTOUR INTERVAL 200 FEET
 WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
 TRANSVERSE MERCATOR PROJECTION**

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 10
 1965 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 16°5' (290 MILS) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 16° (280 MILS) EASTERLY FOR THE CENTER OF THE EAST EDGE.

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

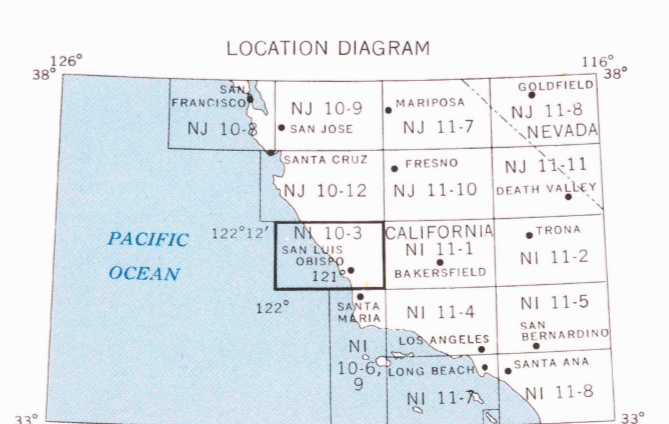

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION:
 10S
 TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 1000 METERS

GRID ZONE IDENTIFICATION:
 EQ FQ GQ
 EP FP GP

TO GIVE A STANDARD REFERENCE TO THIS SHEET TO NEAREST 1000 METERS:

- Read letters identifying 100,000 meter square in which the point lies.
- Locate first HORIZONTAL grid line to left of point and read LARGE figure labeling the line itself.
- Locate first VERTICAL grid line below point and read LARGE figure labeling the line itself.
- Estimate number from grid line to point.

EXAMPLE REFERENCE:
 10S 0550E
 If reporting beyond 10' in any direction, prefix Grid Zone Designation, etc.

STOCK NO. V502XN103-06