

V502, EDITION 3
 Prepared by the U.S. Army Topographic Command (KCSX), Washington, D.C. Compiled in 1957 from United States quadrangles, 1:24,000, 1:25,000, 1:50,000, and 1:62,500; US&GS Chart 5602, 1955. Planimetry revised in part from aerial photographs taken 1952. Map field checked 1957. Revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1965.
 Selected hydrographic data compiled from USC&GS charts. This information is not intended for navigational purposes.
 Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Ow 500,000
 100,000 to 500,000
 25,000 to 100,000
 5,000 to 25,000
 1,000 to 5,000
 Less than 1,000

RAILROADS

Standard gauge
 Narrow gauge
 International
 State
 County
 Park or reservation
 Power line: Mini
 Spot elevation in feet

ROADS

Primary, all-weather, hard surface
 Secondary, all-weather, hard surface
 Light-duty, all-weather, hard or improved surface
 Fair or dry weather, unimproved surface
 Trail
 Interchange
 Landplane airport
 Landing area
 Seaplane airport
 Seaplane anchorage
 Orchard
 Woods/bushwood

BOUNDARIES

International
 State
 County
 Park or reservation
 Power line: Mini
 Spot elevation in feet

LANDMARKS

Route markers: Interstate, U.S., State
 Landmark: School; Church; Other
 Depth curves in feet
 Limit of danger; Reef
 Rocks; Awash
 Foreshore flat
 Intermittent or dry stream
 Marsh or swamp; Rice


Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles
 0 5 10 15 20 25 30 Kilometers
 0 5 10 15 20 Nautical Miles

**CONTOUR INTERVAL 200 FEET
 WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
 TRANSVERSE MERCATOR PROJECTION**

BLACK NUMBERED LINES INDICATE THE 10,000 METER TRANSVERSE MERCATOR GRID, ZONE 10
 1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 18°4' (230 MIL) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 17°4' (210 MIL) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20242

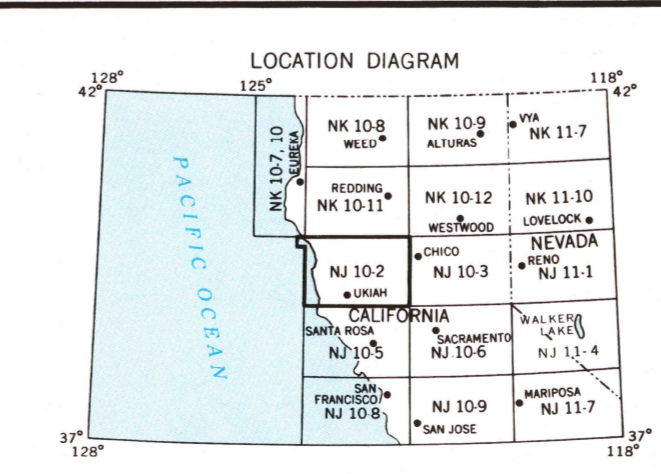

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION: 10S
100,000 M. SQUARE IDENTIFICATION: DV EV
 DU EU

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which the point lies.
 2. Count the vertical grid line miles to left of point and read LARGE figure labeling the line where the point lies or between margin, or on the line itself.
 3. Estimate tenths from the top or right margin, or on the line itself.
 4. Locate first HORIZONTAL grid line below point and read LARGE figure labeling the line where the point lies or between margin, or on the line itself.
 5. Estimate tenths from the grid line to point.

SAMPLE REFERENCE: 000333
 If reporting beyond 10' in any direction, prefix Grid Zone Designation.

USGS Historical File Topographic Division
 UKIAH, CALIFORNIA
 1957
 REVISED 1971

STOCK NO. V502XN102 *** 03