


LEGEND

- Figures in red denote approximate distances in miles between stars
- POPULATED PLACES**
- Over 500,000
 - 100,000 to 500,000
 - 25,000 to 100,000
 - 5,000 to 25,000
 - 1,000 to 5,000
 - Less than 1,000
- RAILROADS**
- Single track
 - Double or multiple track
 - Normal gauge
 - Narrow gauge
- BOUNDARIES**
- International
 - State
 - County
 - Park or reservation
- ROADS**
- Primary, all-weather, hard surface
 - Secondary, all-weather, hard surface
 - Light-duty, all-weather, hard or improved surface
 - Fair or dry weather, unimproved surface
 - Trail
 - Interchange
- Other Symbols:**
- Route markers: Interstate, U.S., State
 - Landmark: School, Church, Other
 - Spot elevation in feet
 - Marsh or swamp
 - Intermittent or dry stream
 - Power line
 - Landplane airport
 - Landing area
 - Seaplane airport
 - Seaplane anchorage
 - Woods-brushwood

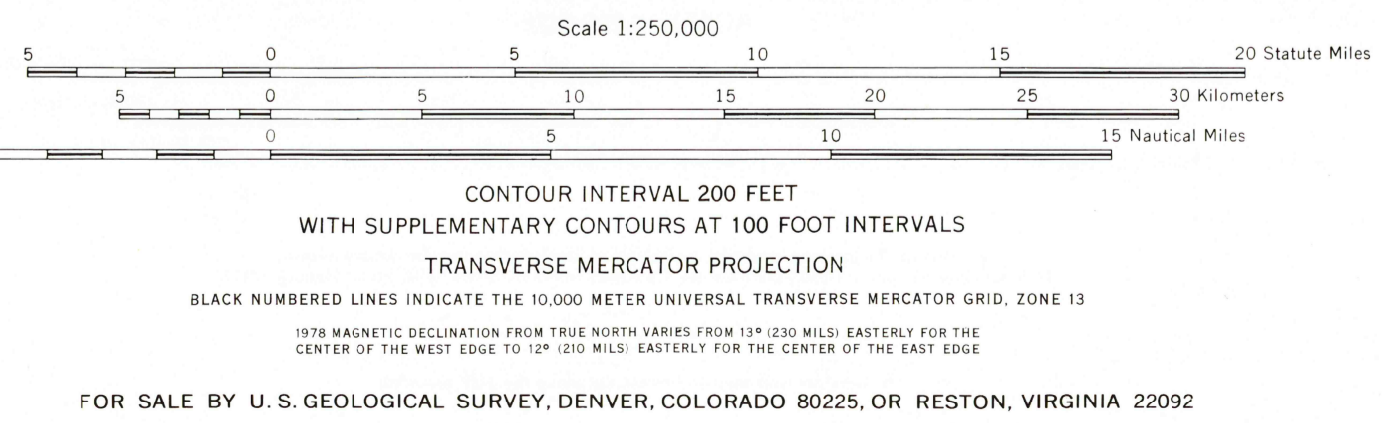

LOCATION DIAGRAM

42°	41°	40°	39°
NK 12-9	NK 13-7	NK 13-8	NK 13-9
NK 12-10	NK 13-8	NK 13-9	NK 13-10
NK 12-11	NK 13-9	NK 13-10	NK 13-11
NK 12-12	NK 13-10	NK 13-11	NK 13-12
NK 12-13	NK 13-11	NK 13-12	NK 13-13
NK 12-14	NK 13-12	NK 13-13	NK 13-14
NK 12-15	NK 13-13	NK 13-14	NK 13-15
NK 12-16	NK 13-14	NK 13-15	NK 13-16
NK 12-17	NK 13-15	NK 13-16	NK 13-17
NK 12-18	NK 13-16	NK 13-17	NK 13-18
NK 12-19	NK 13-17	NK 13-18	NK 13-19
NK 12-20	NK 13-18	NK 13-19	NK 13-20
39°	106°	107°	108°

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

TOWNSHIP OR RANGE LINE

LAND GRANT BOUNDARY

GRID ZONE DESIGNATION: 13S

100,000 M SQUARE IDENTIFICATION

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: 1000

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin or on the line itself.

3. Estimate tenths from grid line to point.

4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the top or right margin or on the line itself.

5. Estimate tenths from grid line to point.

EXAMPLE REFERENCE: If reporting beyond 18 in any direction, prefix Grid Zone Designation as: 13S87250

DENVER, COLORADO

1953
REVISED 1954

Prepared by the Defense Mapping Agency Topographic Center, Washington, D. C. Compiled in 1955 by photogrammetric methods and from USGS quadrangles 1:24,000, 1:31,000, and 1:62,500-scale, dated 1903-1953. Photographs field annotated 1953. Revised by the U. S. Geological Survey from aerial photographs taken 1973, 1975, 1976 and other source data. Revised information not field checked. Map edited 1978.

Area covered by dashed light-blue pattern is subject to controlled inundation 100,000-foot grids based on Colorado coordinate system, central and north zones.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

There may be private inholdings within the boundaries of Federal or State reservations shown on this map.

RETURN TO U.S. GEOLOGICAL SURVEY MAP ARCHIVES