



Carrabelle
FLORIDA

1:100 000-scale metric
topographic-bathymetric map

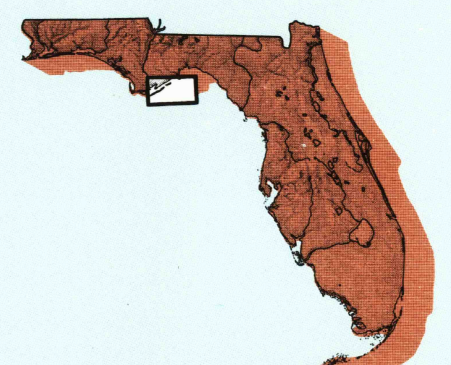

30 X 60 MINUTE QUADRANGLE
SHOWING

- Contours and elevations in meters
- Highways, roads and other manmade structures
- Water features
- Woodland areas
- Geographic names
- Bathymetric contours in meters

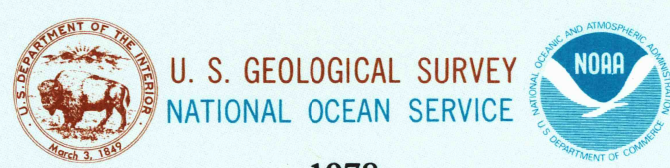

Produced by the United States Geological Survey and National Ocean Service

Compiled from USGS 1:250 000-scale topographic maps dated 1943-1950. Planimetry revised from aerial photographs taken 1976 and other source data. Revised information not field checked. Map edited 1978. Bathymetry added 1984.

Bathymetry compiled by the National Ocean Service from tide-coordinated hydrographic surveys. This information is not intended for navigational purposes.

Mean low water (dotted) line and mean high water (heavy solid) line compiled by NCS from tide-coordinated aerial photographs. Apparent shorelines (outer edge of vegetation) shown by light solid line. Projection and 10 000-meter grid, zone 16 Universal Transverse Mercator 25 000-foot grid ticks based on Florida coordinate system, north zone 1927 North American Datum.

To place on the predicted North American Datum 1983 move the projection lines 21 meters south and 9 meters west.

Offshore protection survey data, shown in red, furnished by the Minerals Management Service. Heavy lines indicate limits of Outer Continental Shelf Official Protection Diagrams, dated June 2, 1983. The protection on this map are not for Federal leasing purposes; for such purposes, refer to the 1:250 000-scale OCS Official Protection Diagrams available from the Minerals Management Service.

There may be private inholdings within the boundaries of the National or State reservations shown on this map.

CONTOUR INTERVAL: 5 METERS
NATIONAL GEODETIC VERTICAL DATUM of 1929
ELEVATIONS SHOWN TO THE NEAREST METER
BATHYMETRIC CONTOUR INTERVAL: 5 METERS, WITH SUPPLEMENTARY 1 METER CONTOURS—DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS. BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS AND/OR STANDARDS USED AS OF THE DATE OF THE SURVEYS

CONVERSION TABLE		DECLINATION DIAGRAM		ADJOINING MAPS			
Meters	Feet	MAGNETIC DECLINATION		1	2	3	
1	3.2808			4	5		
2	6.5617			6	7	8	
3	9.8425						1 Panama City
4	13.1234						2 Tallahassee
5	16.4042						3 Perry
6	19.6850						4 Fort Saint Joe
7	22.9658						5 Cross City
8	26.2467						6
9	29.5275						7
10	32.8084						8 Cedar Keys
To convert meters to feet multiply by 3.2808		UTM grid convergence (feet) at center of map					
To convert feet to meters multiply by 0.3048		Diagram is approximate					

ISBN 0-607-13633-2



Topographic Map Symbols

Primary highway, hard surface	
Secondary highway, hard surface	
Light duty road, principal street, hard or improved surface	
Other road or street; trail	
Route marker: Interstate, U. S. State	
Railroad: standard gauge; narrow gauge	
Bridge: overpass; underpass	
Tunnel: road; railroad	
Built-up area; locality; elevation	
Airport; landing field; landing strip	
National boundary	
State boundary	
County boundary	
National or State reservation boundary	
Land grant boundary	
U. S. public lands survey: range, township; section	
Range, township; section line: protected	
Power transmission line; pipeline	
Dam; dam with lock	
Cemetery; building	
Windmill; water well; spring	
Mine shaft; adit or cave; mine; quarry; gravel pit	
Campground; picnic area; U. S. location monument	
Rail; cliff dwelling	
Distorted surface: strip mine; levee; sand	
Contours: index; intermediate; supplementary	
Bathymetric contours: index; intermediate	
Stream; lake; perennial intermittent	
Rapids; large and small; falls, large and small	
Area to be submerged; marsh; swamp	
Land subject to controlled inundation; woodland	
Scrub; mangrove	
Orchard; vineyard	

A pamphlet describing topographic maps is available on request

