


Feet	Meters
1	3048
2	6096
3	9144
4	12192
5	15240
6	18288
7	21336
8	24384
9	27432
10	30480

To convert feet to meters multiply by 3048
To convert meters to feet multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide

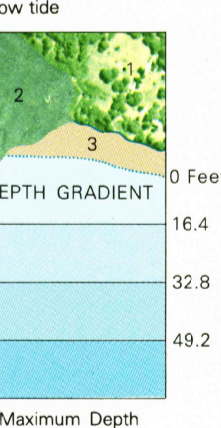


Produced by the United States Geological Survey and National Ocean Survey
Control by USGS and NOS/NOAA
Orthophotomap prepared from aerial photograph taken January 10, 1976. Compiled by photogrammetric methods from aerial photographs taken January 1975 and planetable surveys May 1978. Field checked 1976. Map edited 1982. Supersedes topographic map dated 1945.
Bathymetry compiled by the National Ocean Survey from tide-coordinated hydrographic surveys.
This information is not intended for navigational purposes.
Mean low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs.
Apparent shoreline (outer edge of vegetation) shown by photomagnery.
Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic).
1000-meter Universal Transverse Mercator grid, zone 16 1927 North American Datum.
To place on the predicted North American Datum 1983 move the projection lines 22 meters south and 8 meters west as shown by dashed corner ticks.
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

UTM GRID AND 1982 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

QUADRANGLE LOCATION

HYDROGRAPHIC SURVEY INFORMATION

Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-5793	1935	1:10,000	01-10
H-5794	1936	1:20,000	01-12
H-6794	1942-43	1:40,000	10-32
H-6797	1942-43	1:20,000	02-11
H-6798	1943	1:20,000	02-15
H-6799	1943	1:20,000	02-10

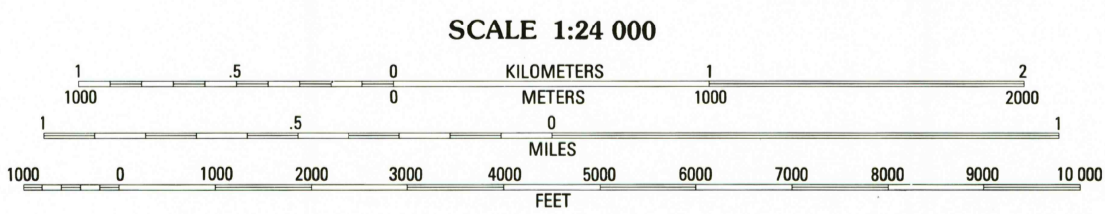


SCALE 1:24 000

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
NATIONAL GEODETTIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY 0.5 METER CONTOURS—DATUM IS MEAN LOWER LOW WATER
THE RELATIONSHIP BETWEEN THE DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.5 METER

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH NATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS AND/OR STANDARDS USED AT THE DATE OF THE SURVEY

FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

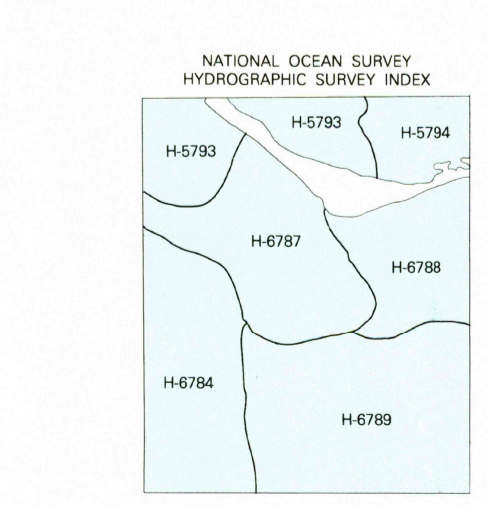

ROAD CLASSIFICATION

Primary highway, hard surface
Secondary highway, hard surface
Trails
Interstate Route
U. S. Route
County Route

Light-duty road, hard or improved surface
Unimproved road

CONTOURS AND ELEVATIONS IN METERS

CAPE ST. GEORGE, FLA.
29085-E1-TB-024
1982
DMA 3843 II SE - SERIES V8470

APR 09 1984

RETURN TO:
USGS AND HISTORICAL MAP ARCHIVES