



Feet	Meters
1	3048
2	6096
3	9144
4	12192
5	15240
6	18288
7	21336
8	24384
9	27432
10	30480

To convert feet to meters multiply by 3.048
To convert meters to feet multiply by 3.2808

1. Dryland
2. Wetlands (May be partially submerged at mean high tide)
3. Exposed at mean low tide




Produced by the United States Geological Survey and the National Ocean Service
Control by USGS and NOS/NOAA
Orthophotomap prepared by the Geological Survey from aerial photograph taken January 10, 1976. Topography by photogrammetric methods from aerial photographs taken January 1975 and planetable surveys 1978. Field checked 1978. Map edited 1981
Supersedes topographic map dated 1943
Bathymetry compiled by the National Ocean Service from tide-coordinated hydrographic surveys
Soundings compiled from NOS chart 11404
This information is not intended for navigational purposes
Mean low water (dotted) line and mean high water (solid) line compiled by NOS from tide-coordinated aerial photographs
Apparent shoreline (outer edge of vegetation) shown by photogrammetry
Projection and 10,000-foot grid ticks: Florida coordinate system, north zone (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 16 1927 North American Datum
The difference between 1927 North American Datum and North American Datum of 1983 (NAD 83) for 7.5-minute intersections is given in USGS Bulletin 1875. The NAD 83 is shown by dashed corner ticks
Dotted land lines established by private subdivision of the Forbes Purchase
There may be private inholdings within the boundaries of the National or State reservations shown on this map
Photinspected from 1991 source; no major culture or drainage changes observed. Boundaries, other than corporate and names revised 1992

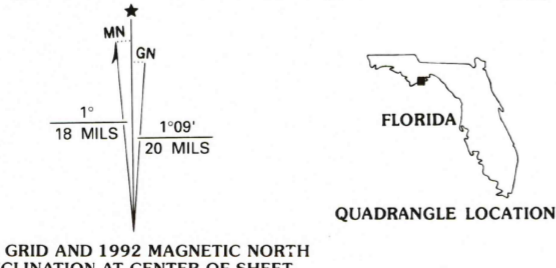


HYDROGRAPHIC SURVEY INFORMATION

Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-5795	1934-35	1:10,000	0.1-0.6
H-5819	1935	1:20,000	0.5-1.5
H-5867	1935	1:20,000	0.2-1.5
H-9704	1977	1:40,000	1.0-1.5

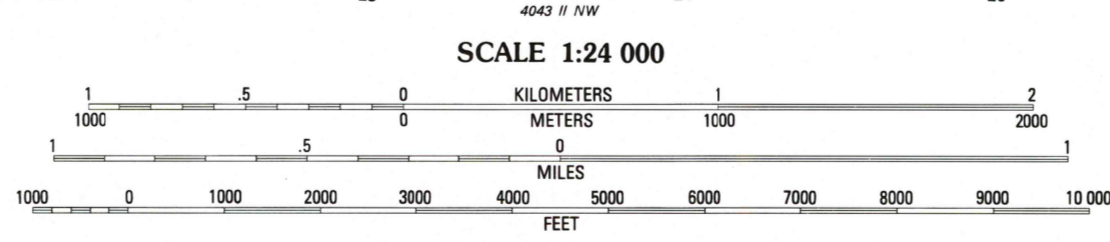

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY 0.5 METER CONTOURS—SOUNDINGS IN METERS
GULF COAST LOW WATER DATUM
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.8 METERS

BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY
FOR SALE BY U. S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
AND NATIONAL OCEAN SERVICE, ROCKVILLE, MARYLAND 20852
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

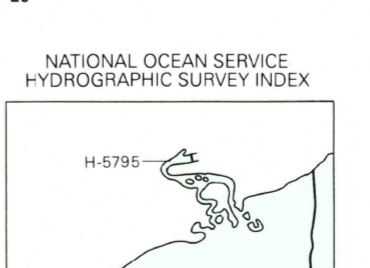

ROAD CLASSIFICATION

Primary highway, hard surface — Light-duty road, hard or improved surface
Secondary highway, hard surface — Unimproved road
Trails —

Interstate Route U. S. Route State Route

CONTOURS AND ELEVATIONS IN METERS

USGS AND HISTORICAL MAP ARCHIVES
MAY 23 1996
REC'D FILE COPY

CARRABELLE, FLA.
29084-G6-OM-024
1981
MINOR REVISION 1992
DMA 4043 I SW-SERIES V8470

