




Produced by the United States Geological Survey
 Control by USGS and NOS/NOAA
 Planimetry by photogrammetric methods from aerial photographs taken 1951. Topography by planetable surveys 1955
 Projection and 10,000-foot grid ticks: Florida coordinate system, west zone (transverse Mercator)
 1000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue 1927 North American Datum (NAD 27)
 North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are given in USGS Bulletin 1875
 There may be private inholdings within the boundaries of the National or State reservations shown on this map
 Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

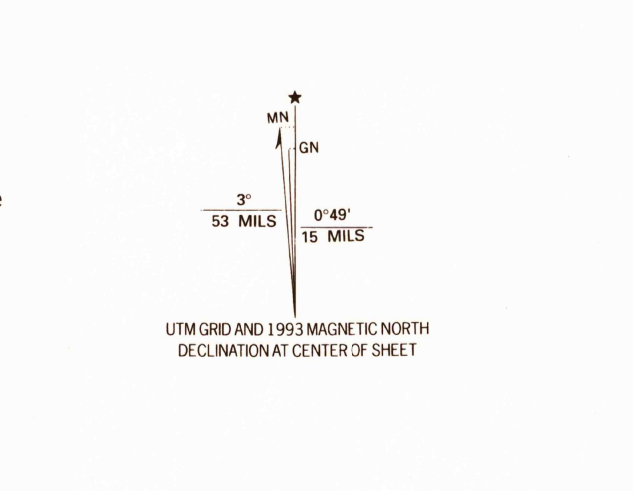

SCALE 1:24,000
 1000 0 1000 2000 3000 4000 5000 6000 7000 FEET
 1 KILOMETER
 CONTOUR INTERVAL 5 FEET
 NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
 FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
 A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
 Primary highway, hard surface
 Secondary highway, hard surface
 Unimproved road
 Interstate Route
 U.S. Route
 State Route
 Light-duty road, hard or improved surface
 Unimproved road
 Interstate Route
 U.S. Route
 State Route

LEBANON STATION, FLA.
 29082-B6-TF-024
 1955
 REVISED 1993
 DMA 4442 II NW-SERIES V847

QUADRANGLE LOCATION
 Boundaries shown in purple and woodland compiled in cooperation with State of Florida agencies from aerial photographs taken 1989-1990 and other sources
 Contours not revised. This information not field checked
 Map edited 1993

