


Mapped by the U. S. Corps of Engineers and published by the Geological Survey. Control by USC&GS, USCE, and Florida Geodetic Survey. Topography from aerial photographs by photogrammetric methods and by plane-table surveys 1950-1951. Aerial photographs taken 1950. Field check by the Geological Survey 1952. Polyconic projection. 1927 North American datum. 10,000-foot grid based on Florida coordinate system, east zone. Dashed land lines indicate approximate locations. 100-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue.

Revisions shown in purple compiled by the Geological Survey from aerial photographs taken 1972. This information not field checked.

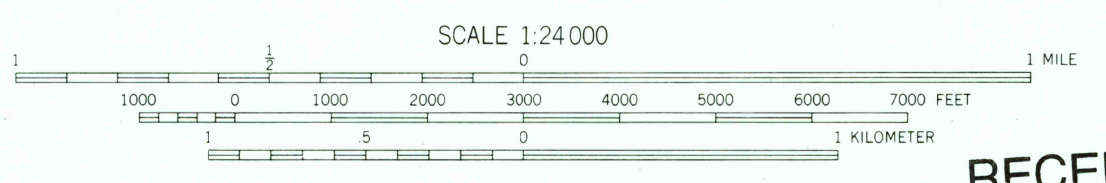

CONTOUR INTERVAL 5 FEET DATUM IS MEAN SEA LEVEL

RECEIVED JUL 3 1 2002



ROAD CLASSIFICATION: Heavy-duty (4 LANE 6 LANE), Medium-duty (4 LANE 6 LANE), U. S. Route, Light-duty, Unimproved dirt, State Route.

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C. 20242. A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST.

LORIDA, FLA. N2722.5-W8115/7.5 1952 PHOTOREVISED 1972 AMS 4738 IV NE-SERIES V847

