

Prepared by the Army Map Service (KCSX), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1956 by photogrammetric methods and from USCG quadrangles 1:25,000, 1946-47 and USGS Charts 1949-56. Control by USGS, USCGS and Florida Geodetic Survey. Map field checked 1956. Limited revision by U.S. Geological Survey 1962.

100,000-foot grid based on Florida coordinate system, east zone

10,000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue

LEGEND

ROAD DATA 1956 PARTIALLY REVISED 1962
Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
100,000 to 500,000
25,000 to 100,000
5,000 to 25,000
1,000 to 5,000
Less than 1,000

RAILROADS

Standard gauge
Narrow gauge
International
State
County
Park or reservation
Horizontal control point
Spot elevation in feet

BOUNDARIES

State
County
Park or reservation
Horizontal control point
Spot elevation in feet

LANDMARKS

School; Church; Other
Depth curve in feet
Limit of danger; Reef
Rocks; Awaah; Sunken
Foreshore flat; Mangrove
Orchard
Marsh or swamp

Approximate road alignment

Scale 1:250,000

0 5 10 15 20 Statute Miles

0 5 10 15 20 30 Kilometers



0 5 10 15 20 Nautical Miles

MAXIMUM ELEVATION LESS THAN 50 FEET

TRANSVERSE MERCATOR PROJECTION

1960 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 1°30' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 0°15' EASTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 0°05' WESTERLY.

FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.

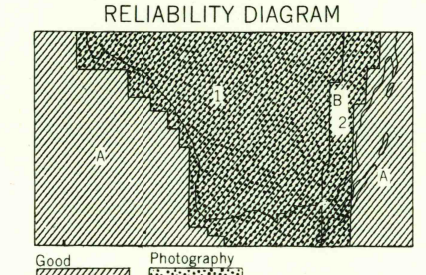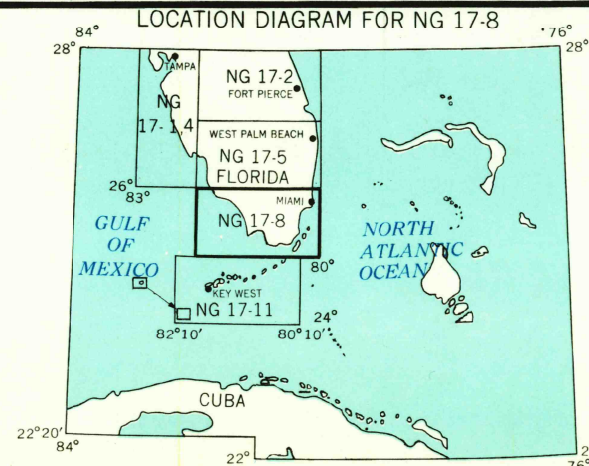

MR 7782 INTERIOR-GEOLOGICAL SURVEY, WASHINGTON, D.C.-1963

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

USGS
LAND GRAM
TOPOGRAPHIC DIVISION

5635

MIAMI, FLORIDA
1956
LIMITED REVISION 1962