

V501, EDITION 3
 Prepared by the U.S. Army Topographic Command (KCSX), Washington, D.C. Compiled in 1956 by photogrammetric methods and from United States quadrangles, 1:25,000, 1946-47 and USCGS charts, 1949-56. Planimetry revised in part from aerial photographs taken 1950. Map field checked 1956. Revised in 1971 by the U.S. Geological Survey from aerial photographs taken 1969-70.
 Selected hydrographic data compiled from USCGS charts. This information is not intended for navigational purposes.
 Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
 100,000 to 500,000
 25,000 to 100,000
 5,000 to 25,000
 1,000 to 5,000
 Less than 1,000

ROADS

Primary, all-weather, hard surface
 Secondary, all-weather, hard surface
 Light-duty, all-weather, hard or improved surface
 Fair or dry weather, unimproved surface
 Trail
 Interchange

RAILROADS

Single track
 Double or Multiple Standard gauge
 Narrow gauge
 Landplane airport
 Landing area
 Seaplane airport
 Power line
 Park or reservation
 Spot elevation in feet

BOUNDARIES

International
 State
 County
 Park or reservation

Other Features:

Route markers: Interstate, U.S., State
 Landmark: School, Church, Other
 Depth curve in feet
 Limit of danger: Reef
 Rocks: Awash
 Foreshore flat; Mangrove
 Orchard
 Intermittent or dry stream
 Marsh or swamp

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles
 0 5 10 15 20 25 30 Kilometers
 0 5 10 15 20 25 30 Nautical Miles


MAXIMUM ELEVATION LESS THAN 50 FEET

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 1° 00' 00" WEST TO 1° 10' 00" WEST FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20244

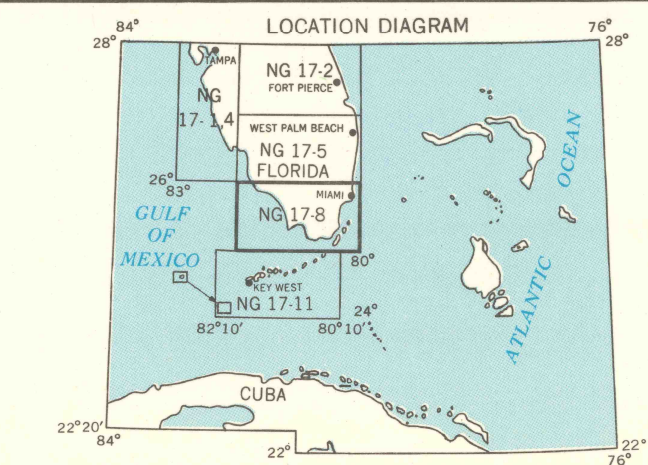

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

USGS Historical File Topographic Division

MIAMI, FLORIDA
 1956
 REVISED 1971
 MAR 14 1974

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

GRID ZONE IDENTIFICATION: 17U
 100,000 M. SQUARE IDENTIFICATION: LU MU NU PU
 LT MT NT PT

1. Read letters identifying 100,000 meter square in which the point is.
 2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
 3. Estimate tenths from grid line to point.
 4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.
 5. Estimate tenths from grid line to point.
 6. Reporting beyond 10' in any direction, prefix Grid Zone Designation, ex: 17UW0337

STOCK NO. V501XNG178**03