

Prepared by the U.S. Army Topographic Command (TVSX), Washington, D.C. Compiled in 1957 from United States quadrangles 1:24,000, 1:25,000, and 1:50,000, 1936-53; USCGS charts 1943-50. Planimetry revised from aerial photographs taken 1955. Map field checked 1957. Revised by the U.S. Geological Survey 1970.

Selected hydrographic data compiled from USCGS charts 1943-50. This information is not intended for navigational purposes.

100,000-foot grids based on Florida coordinate system, north zone and Alabama coordinate system, west zone.

Location of geodetic control established by agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

There may be minor inholdings within the boundaries of the National or State reservations shown on this map.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

ROADS

- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Interchange
- Trail
- Bar Harbor

RAILROADS

- Single-track, double or multiple standard gauge
- Narrow gauge
- Landplane airport
- Landing area
- Seaplane airport
- Power line
- Park or reservation
- Spot elevation in feet

BOUNDARIES

- International
- State
- County
- Park or reservation
- Spot elevation in feet

Other symbols:

- Fishkill
- Route markers: Interstate, U.S., State
- Landmarks: School; Church; Other
- Depth curve in feet
- Limit of danger; Reef
- Rock; Asean
- Foreshore; Jetty
- Intermittent or dry stream
- Marsh or swamp

Scale 1:250,000

0 5 10 15 20 25 30 35 Statute Miles

0 5 10 15 20 25 30 Kilometers

0 5 10 15 20 25 30 Nautical Miles


CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 3° 30' (60 MILES) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 2° 14' (MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092

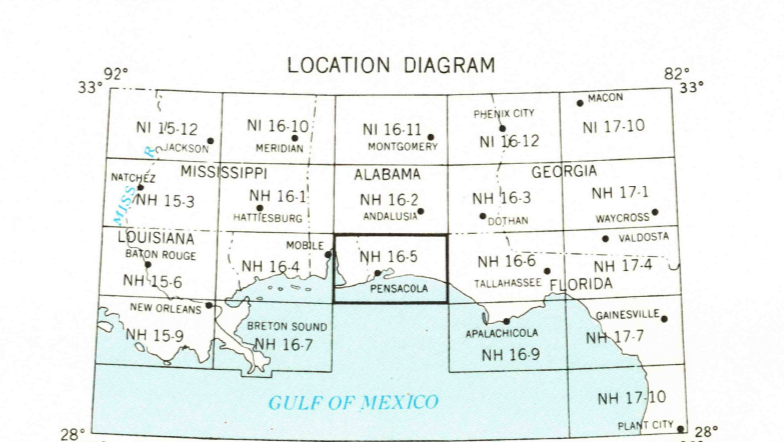

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION

16R

100,000 M. SQUARE IDENTIFICATION

DJ	EK
DJ	EK

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: NEBOLD

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom corners, or on the line figure itself.

3. Locate first HORIZONTAL grid line to RIGHT of point and read LARGE figure labeling the line either in the left or right margin, or on the line itself. Estimate tenths from grid line to point.

SAMPLE REFERENCE 16R19E

RETURN TO USGS NHD HISTORICAL MAP ARCHIVES

PENSACOLA, FLA.; ALA.

1957
REVISED 1970

USGS NHD HISTORICAL MAP ARCHIVES

ISBN # 0607145005 FL 250

TF

0607145001