


V501
Edition 1-AMS (First Printing 1-59)
Prepared by the Army Map Service (USMC) Corps of Engineers, U. S. Army, Washington, D. C. Compiled in 1956 by photogrammetric methods and from Florida 1:25,000 USGS 1:50,000, Florida 1:25,000 AMS, 1947-51; Florida 1:31,680 USGS 1945-46; Florida 1:50,000 AMS, Lake Talquin, copied 1953; Florida 1:62,500 USGS, Tallahassee, Arrian edition 1943. Planimetric detail revised by photogrammetric methods. Horizontal and vertical control by USCGS, USGS and CE. Map field checked, 1954.


LEGEND
ROAD DATA 1954
Figures in red denote approximate distances in miles between stars

POPULATED PLACES	PODS	LANDS & LINES
Over 500,000	Hard surface, heavy duty	Two lanes wide, Federal route marker
100,000 to 500,000	More than two lanes wide	Two lanes wide, State route marker
25,000 to 100,000	Two lanes wide, Federal route marker	More than two lanes wide
5,000 to 25,000	Two lanes wide, State route marker	Improved light duty
1,000 to 5,000	Improved light duty	Unimproved dirt
Less than 1,000	Unimproved dirt	Trail
RAILROADS	Standard gauge	Landmarks: Schools, Church, Other
Narrow gauge	Light track, double or multiple	Death curve in feet
Standard gauge	Long Point	Limit of danger; Reef
Landline airport	Seaplane airport	Rocks: Awash; Sunken
Landing area	Power line	Foreshore flat
State	Intermittent or dry stream	Marsh or swamp
County	Ditch	
Park or reservation	Woods/brushwood	
Horizontal control point		
Spot elevation in feet		

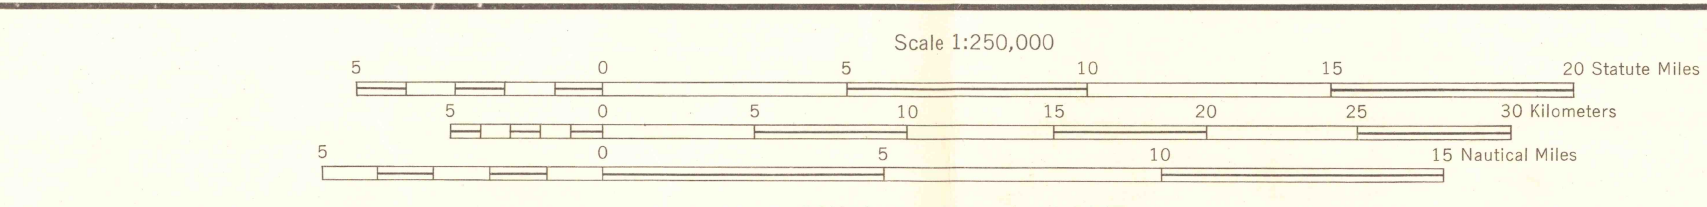

CONTOUR INTERVAL 50 FEET
WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
TRANSVERSE MERCATOR PROJECTION
BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16
THE LAST FOUR FIGURES OF THE GRID NUMBERS ARE OMITTED

1958 MAGNETIC DECLINATION FOR THIS SHEET VARIES FROM 3° 30' EASTERLY FOR THE CENTER OF THE WEST EDGE TO 2° 15' WESTERLY FOR THE CENTER OF THE EAST EDGE. MEAN ANNUAL CHANGE IS 15" WESTERLY.
USING MOVING ERRORS OR OMISSIONS ON THIS MAP ARE LEGS TO MARK HEREON AND FORWARDED DIRECTLY TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D. C. MAPS SO FORWARDED WILL BE RETURNED OR REFUSED IF DESIRED.

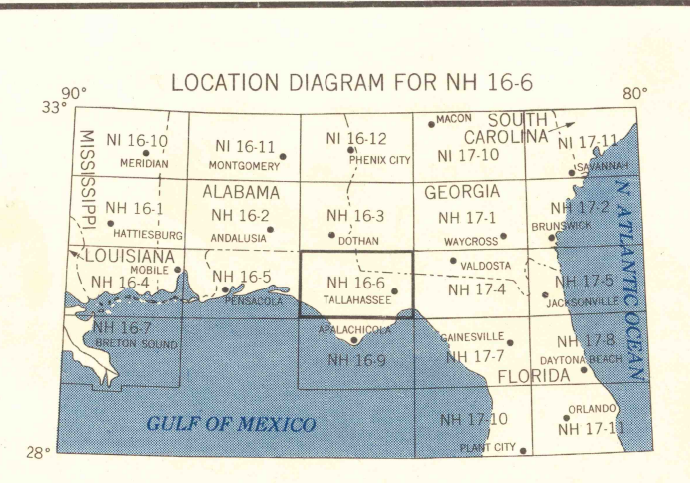

RELIABILITY DIAGRAM

PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS, 1-59, 665939 SX

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 200 METERS
EXAMPLE POINT: TALLAHASSEE

1. Read letters identifying 100,000 meter square in which the point lies.
2. Locate that vertical grid line to left of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
3. Estimate meters from grid line to point.
4. Locate that horizontal grid line below point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.
5. Estimate meters from grid line to point.

FRONTING BEARING 10° in any direction, prefix Grid Zone Designation, e.g. 18RMA10

UNITED STATES GOVERNMENT PRINTING OFFICE: 1958

LIBRARY
APR 13 1959
U. S. GEOLOGICAL SURVEY
WASHINGTON, D. C.