



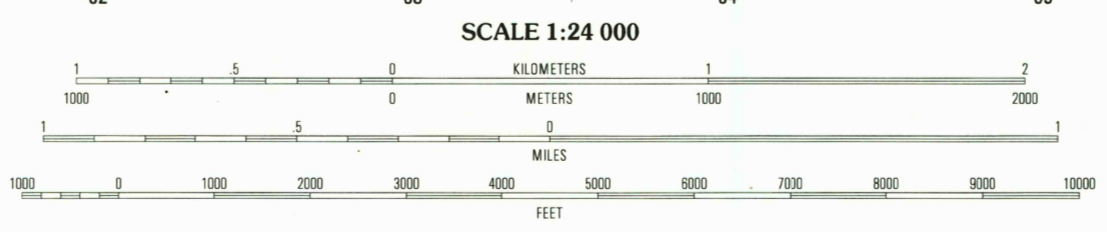

Produced by the United States Geological Survey Topography compiled 1959 and 1960. Planimetry derived from imagery taken 1966. Survey control current as of 1963. Contours that conflict with updated major features are dashed. North American Datum of 1983 (NAD 83). Projection and 1000-meter grid: Universal Transverse Mercator, zone 4. 10 000-foot ticks: Hawaii Coordinate System of 1983 (zone 4). Old Hawaiian Datum is shown by dashed corner ticks. The values of the shift between NAD 83 and Old Hawaiian Datum for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software. There may be private inholdings within the boundaries of the National or State reservations shown on this map.

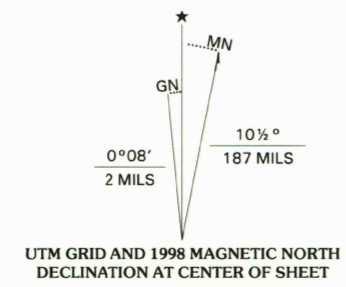

CONTOUR INTERVAL 40 FEET SUPPLEMENTARY CONTOUR INTERVAL 20 FEET DATUM IS MEAN SEA LEVEL TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048 SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER THE MEAN RANGE OF TIDE IS APPROXIMATELY 1 FOOT

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225 A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



QUADRANGLE LOCATION table with 3 columns and 6 rows of numbers.

ROAD CLASSIFICATION Primary highway hard surface Secondary highway hard surface Interstate Route U.S. Route State Route Light-duty road, hard or improved surface Unimproved road

RECEIVED MAR 31 1999 USGS NMD HISTORICAL MAP ARCHIVES

ANAHOLA, HI 1996

NIMA 5122 III NW-SERIES W833

