
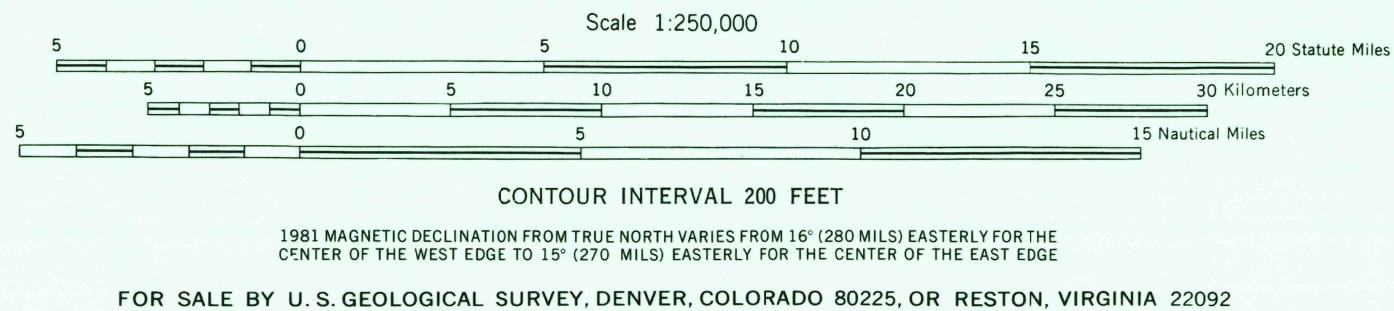


PRODUCED BY THE U. S. GEOLOGICAL SURVEY  
Base map prepared by Defense Mapping Agency by photogrammetric methods and from 1:24,000, 1:62,500 and 1:125,000-scale maps dated 1899-1951. Field checked 1955. Revised by the U. S. Geological Survey from aerial photographs taken 1973, 1975 and 1978 and other source data. Revised information not field checked. Map edited 1981.  
Transverse Mercator Projection, 10,000-meter Universal Transverse Mercator grid, zone 12. 100,000-foot grid ticks based on Wyoming coordinate system, west zone, and Idaho coordinate system, east zone. 1927 North American Datum. To place on the predicted North American Datum 1983, move the projection lines 11 meters north and 63 meters east.  
Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.  
There may be private inholdings within the boundaries of the National or State reservations shown on this map.

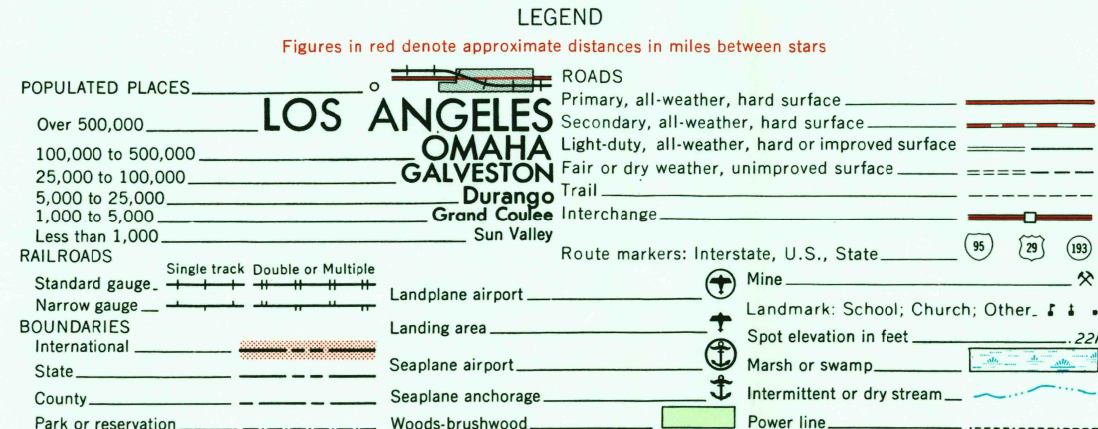

**LOCATION DIAGRAM**

11-9	12-7	12-8	12-9	13-7
11-10	12-10	12-11	12-12	13-10
11-11	12-11	12-12	13-11	13-12
11-12	12-12	12-13	13-12	13-13
11-13	12-13	12-14	13-13	13-14
11-14	12-14	12-15	13-14	13-15
11-15	12-15	12-16	13-15	13-16
11-16	12-16	12-17	13-16	13-17
11-17	12-17	12-18	13-17	13-18
11-18	12-18	12-19	13-18	13-19
11-19	12-19	12-20	13-19	13-20

**SECTIONIZED TOWNSHIP**

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

**GRID ZONE DESIGNATION**

180,000 M. SQUARE IDENTIFICATION

VD	WD	400
VC	WC	50

**TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS**

**SAMPLE POINT: MIDDLE**

1. Read letters identifying 100,000 METER square in which the point lies.  
2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.  
3. Estimate tenths from grid line to point.  
4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.  
5. Estimate tenths from grid line to point.  
6. If reporting beyond 10" in any direction, prefix Grid Zone Designation, as: 47N02354