



V502, EDITION 3

Prepared by the Army Map Service (HYSX), Corps of Engineers, U.S. Army, Washington, D.C. Compiled in 1959 by photogrammetric methods and from USGS and AMS quadrangles 1:250,000 and 1:50,000, 1949-52. Horizontal and vertical control by USGS, USCGS and USCE. Photography field annotated 1958. Limited revision by U.S. Geological Survey 1966

100,000-foot grids based on Idaho coordinate system, west zone, and Washington coordinate system, north zone

LEGEND

ROAD DATA 1958 PARTIALLY REVISED 1966
Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000	LOS ANGELES
100,000 to 500,000	OMAHA
25,000 to 100,000	GALVESTON
5,000 to 25,000	Laramie
1,000 to 5,000	Grand Coulee
Less than 1,000	Sun Valley

RAILROADS

Standard gauge
Narrow gauge
Intermittent or dry stream
Marsh or swamp
Woods brushwood
Power line

LANDMARKS: School Church Other
Horizontal control point
Spot elevation in feet
Marsh or swamp
Intermittent or dry stream
Power line

BOUNDARIES
State
County
Park or reservation

APPROXIMATE ROAD ALIGNMENT

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles
0 5 10 15 20 25 30 Kilometres
0 5 10 15 20 25 30 Nautical Miles


CONTOUR INTERVAL 200 FEET
WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METRE UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11

1984 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 21°5' (380 METERS) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 21°37'0" (370 METERS) WESTERLY FOR THE CENTER OF THE EAST EDGE.

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

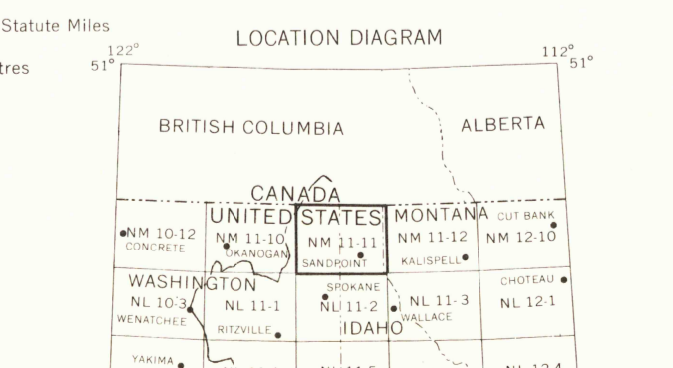

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 11U

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: "RUBY"

1. Read letters identifying 100,000 metre square on which the point lies.

2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure below the line either in the top or bottom margin, or in the inner field.

3. Estimate tenths from grid line to point.

4. Locate first HORIZONTAL grid line BELOW point and read LARGE figure below the line either in the left or right margin, or in the inner field.

5. Estimate tenths from grid line to point.

6. If necessary, reverse 2nd in any direction, prefix Grid Zone Designation, ex: 11UM0784

SANDPOINT, IDAHO, WASH., MONT.
1958
LIMITED REVISION 1966
USGS
Historical File
Topographic Division

STOCK NO. V502NM1111*03