


Mapped by the Geological Survey
1946

Only landmark buildings are shown in the cities of Sterling and Rock Falls

ROAD CLASSIFICATION
Heavy-duty ——— 2 LANE 16' LANE Light-duty ———
Medium-duty - - - - 4 LANE 16' LANE Unimproved dirt - - - -
U. S. Route State Route

UTM GRID AND 1946 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

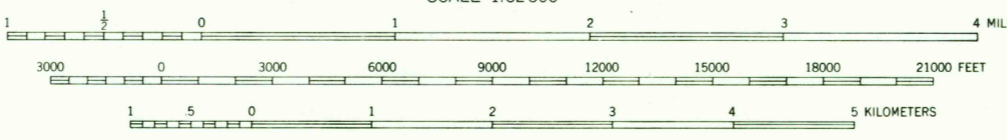

Contour interval 20 feet
Dashed lines represent half interval contours
Datum is mean sea level

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C. 20242
AND BY THE STATE GEOLOGICAL SURVEY, URBANA, ILLINOIS 61801
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
Historical File
Topographic Division

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

Interior-Geological Survey, Washington, D. C. 1969
Polyconic projection. 1927 North American datum
10 000-foot grid based on Illinois (West)
rectangular coordinate system
To join Dixon map use dotted
projection corners
1000-meter Universal Transverse Mercator grid ticks,
zone 16, shown in blue

STERLING, ILL.
N4145-W8930/15
1946
AMS 3067 1-SERIES V763

2620
11 1962