

Prepared by the Defense Mapping Agency, Topographic Center, Washington, D. C. Compiled in 1954 by photogrammetric methods from aerial photographs taken 1952. Photographs field annotated 1953. Revised by the U. S. Geological Survey from aerial photographs taken 1977 and other source data. Revised information not field checked. Map edited 1978.

Area covered by dashed light-blue pattern is subject to controlled inundation 100,000 foot grid based on Indiana coordinate system, east zone, and Ohio coordinate system, north and south zones.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

There may be private inholdings within the boundaries of the National or State reservations shown on this map.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

ROADS

- Primary, all-weather, hard surface
- Secondary, all-weather, hard surface
- Light-duty, all-weather, hard or improved surface
- Fair or dry weather, unimproved surface
- Trail
- Route markers: Interstate, U.S., State

RAILROADS



- Standard gauge
- Narrow gauge
- Intermittent or dry stream
- Power line

BOUNDARIES

- International
- State
- County
- Park or reservation

Other features:

- Landline airport
- Landing area
- Seaplane airport
- Seaplane anchorage
- Woods-brushwood
- Landmark: School; Church; Other
- Marsh or swamp

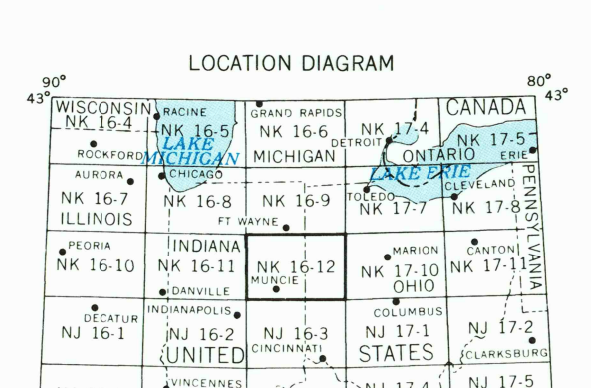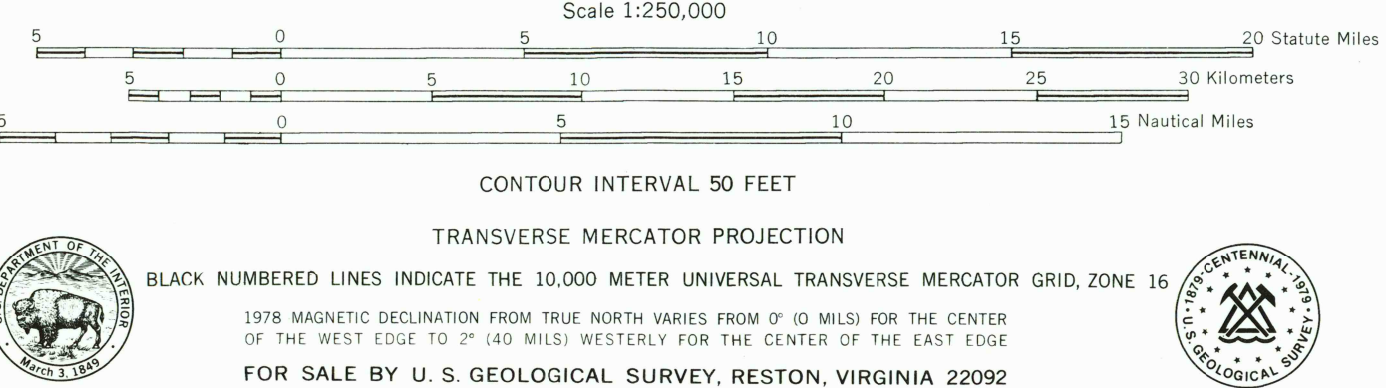

SECTIONED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

GRID ZONE DESIGNATION: 16T

100,000 M. SQUARE IDENTIFICATION

EA FA GA EV FV GV

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

SAMPLE POINT: BALGERS

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first HORIZONTAL grid line to point and read LARGE figure labeling the line within the 100 meter margin, or on the line itself.

3. Locate first VERTICAL grid line to point and read LARGE figure labeling the line within the 100 meter margin, or on the line itself.

4. Estimate tenths from grid line to point.

SAMPLE REFERENCE: 16T578

16T578

Historical File
Topographic Division
MUNCIE, INDIANA; OHIO
1953
REVISED 1978

DEC 10 1979