



U.S. Regional
Depository Copy
DO NOT DISCARD

A.H. ROBINSON
MAP LIBRARY
DEC 26 1991
University of Wisconsin
Madison


310 000 FEET (ILL.)
315 000 FEET (ILL.)
320 000 FEET (ILL.)
325 000 FEET (ILL.)
330 000 FEET (ILL.)
335 000 FEET (ILL.)
340 000 FEET (ILL.)
345 000 FEET (ILL.)
350 000 FEET (ILL.)
355 000 FEET (ILL.)
360 000 FEET (ILL.)
365 000 FEET (ILL.)
370 000 FEET (ILL.)
375 000 FEET (ILL.)
380 000 FEET (ILL.)
385 000 FEET (ILL.)
390 000 FEET (ILL.)
395 000 FEET (ILL.)
400 000 FEET (ILL.)
405 000 FEET (ILL.)
410 000 FEET (ILL.)
415 000 FEET (ILL.)
420 000 FEET (ILL.)
425 000 FEET (ILL.)
430 000 FEET (ILL.)
435 000 FEET (ILL.)
440 000 FEET (ILL.)
445 000 FEET (ILL.)
450 000 FEET (ILL.)
455 000 FEET (ILL.)
460 000 FEET (ILL.)
465 000 FEET (ILL.)
470 000 FEET (ILL.)
475 000 FEET (ILL.)
480 000 FEET (ILL.)
485 000 FEET (ILL.)
490 000 FEET (ILL.)
495 000 FEET (ILL.)
500 000 FEET (ILL.)

Mapped, edited, and published by the Geological Survey
Control by USGS, USC&GS, and USCE


Topography in Kentucky by planetable surveys 1953. Revised 1959
Topography in Illinois from aerial photographs by photogrammetric
methods. Aerial photographs taken 1957. Field check 1958-1959

Polygonic projection. 1927 North American datum
10,000-foot grids based on Kentucky coordinate system, south zone,
and Illinois coordinate system, east zone
1000-meter Universal Transverse Mercator grid ticks,
zone 16, shown in blue

The state boundary as shown represents the approximate position of the low
waterline as determined from U.S. Corps of Engineers Ohio River charts,
surveyed 1912, 1913, and supplementary information

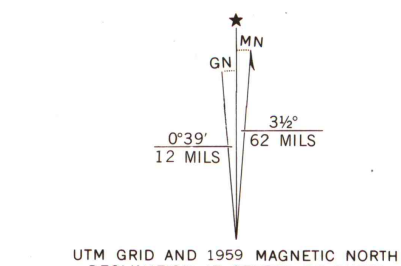


Map photoinspected 1973
No major culture or drainage changes observed

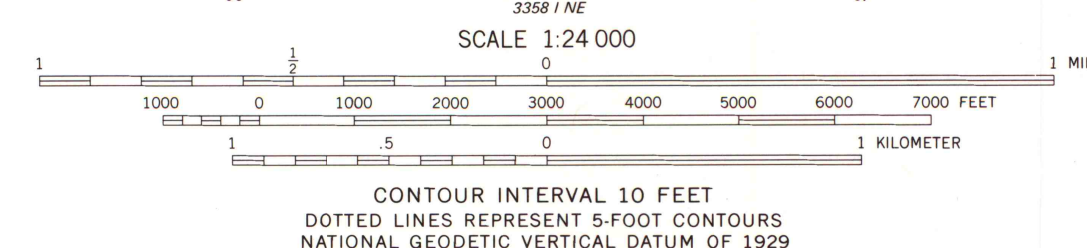

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092
KENTUCKY GEOLOGICAL SURVEY, LEXINGTON, KENTUCKY 40506
AND KENTUCKY DEPARTMENT OF COMMERCE, FRANKFORT, KENTUCKY 40601
AND ILLINOIS GEOLOGICAL SURVEY, CHAMPAIGN, ILLINOIS 61820
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

The difference between 1927 North American Datum and North
American Datum of 1983 (NAD 83) for 7.5-minute intersections
is given in USGS Bulletin 1875. The NAD 83 is shown by
dashed corner ticks

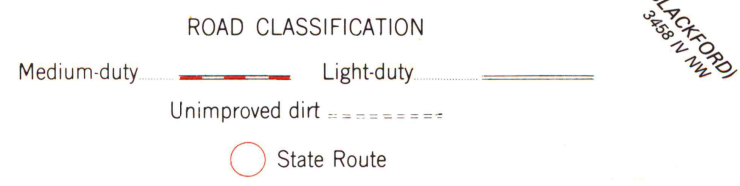

DEKOVEN, KY-ILL
SE/4 SHAWNEETOWN 15' QUADRANGLE
37088-E1-TF-024
1959
PHOTOINSPECTED 1973
DMA 3359 II SE-SERIES V853