



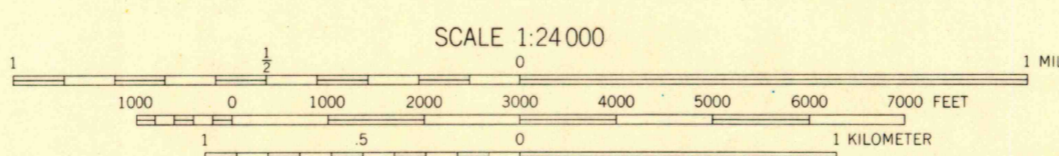

Mapped and edited by Tennessee Valley Authority  
Published by the Geological Survey  
Control by USC&GS, USGS, and TVA  
Topography by USGS and TVA by multiplex methods from aerial  
photographs taken 1948. Field examination by TVA, 1950  
Polyconic projection. 1927 North American datum  
10,000-foot grid based on Kentucky (South) and  
Tennessee rectangular coordinate systems  
--- 3/16 --- Indicates Kentucky Lake Easement Boundary  
1000-meter Universal Transverse Mercator grid ticks,  
zone 16, shown in blue

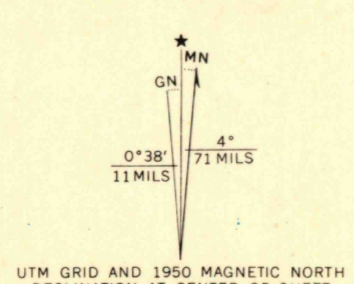

CONTOUR INTERVAL 20 FEET  
DATUM IS MEAN SEA LEVEL

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, D. C. 20242  
KENTUCKY GEOLOGICAL SURVEY, LEXINGTON, KENTUCKY,  
KENTUCKY DEPARTMENT OF COMMERCE, FRANKFORT, KENTUCKY  
AND U. S. TENNESSEE VALLEY AUTHORITY, CHATTANOOGA OR KNOXVILLE, TENN.  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS  
Historical File  
Topographic Division

ROAD CLASSIFICATION

HARD-SURFACE ALL WEATHER ROADS	DRY WEATHER ROADS
Heavy-duty ——— <b>LANE 16 LANE</b> Improved dirt	Medium-duty ——— <b>LANE 16 LANE</b> Unimproved dirt
Loose-surface, graded, or narrow hard-surface	U. S. Route
	State Route

U.S.G.S.  
FILE COPY  
TOPOGRAPHIC DIVISION

HAMLIN, KY.-TENN.  
N3630-W8800/7.5  
1950  
AMS 3357 II SE-SERIES V853

1675  
MAY 12 1966