


War Department mapping project
Under direction of the Chief of Engineers.
Control by the U. S. Coast and Geodetic Survey.
Planimetry compiled from air photographs by U. S. Coast and Geodetic Survey, 1942.
Planetable topography and field edit by U. S. Coast and Geodetic Survey, 1942.
Polyconic projection, North American datum of 1927.
This map complies with the national standard map accuracy requirements.

ROAD CLASSIFICATION 1942

Dependable hard-surface, heavy-duty road.	Loose-surface graded, dry-weather road.	U. S. route 74
Secondary, hard-surface, all-weather road.	Dirt road.	State route 26

More than two lanes indicated by note along road with tick at point of change. LANE 4 LANE

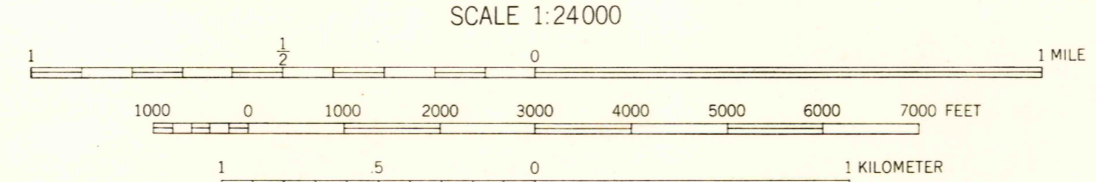

MAXIMUM GROUND ELEVATION 10 FEET
DATUM IS MEAN SEA LEVEL

10,000-FOOT GRID TICKS, MARYLAND PLANE COORDINATE SYSTEM, SHOWN IN BLACK
1000-METER GRID TICKS, UNIVERSAL TRANSVERSE MERCATOR SYSTEM, ZONE 18, SHOWN IN BLUE
REPRINTED FROM MILITARY EDITION FOR CIVIL USE
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

USGS
Historical File
Topographic Division
APPROXIMATE MEAN
DECLINATION, 1942
TRUE NORTH
MAGNETIC NORTH

USGS
FILE COPY
Topographic Division

Recoverable horizontal control stations of less than third order accuracy are shown by circles.

MARION, MD.
N3800-W7545/7.5

FEB 25 1958

1465