


ST. JAMES 5.5 MI.  
ST. JAMES 5.5 MI.  
ST. JAMES 5.5 MI.

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

POINT LOOKOUT QUADRANGLE  
MARYLAND-ST. MARYS CO.  
7.5 MINUTE SERIES (TOPOGRAPHIC-BATHYMETRIC)

ST. JAMES 5.5 MI.  
ST. JAMES 5.5 MI.  
ST. JAMES 5.5 MI.

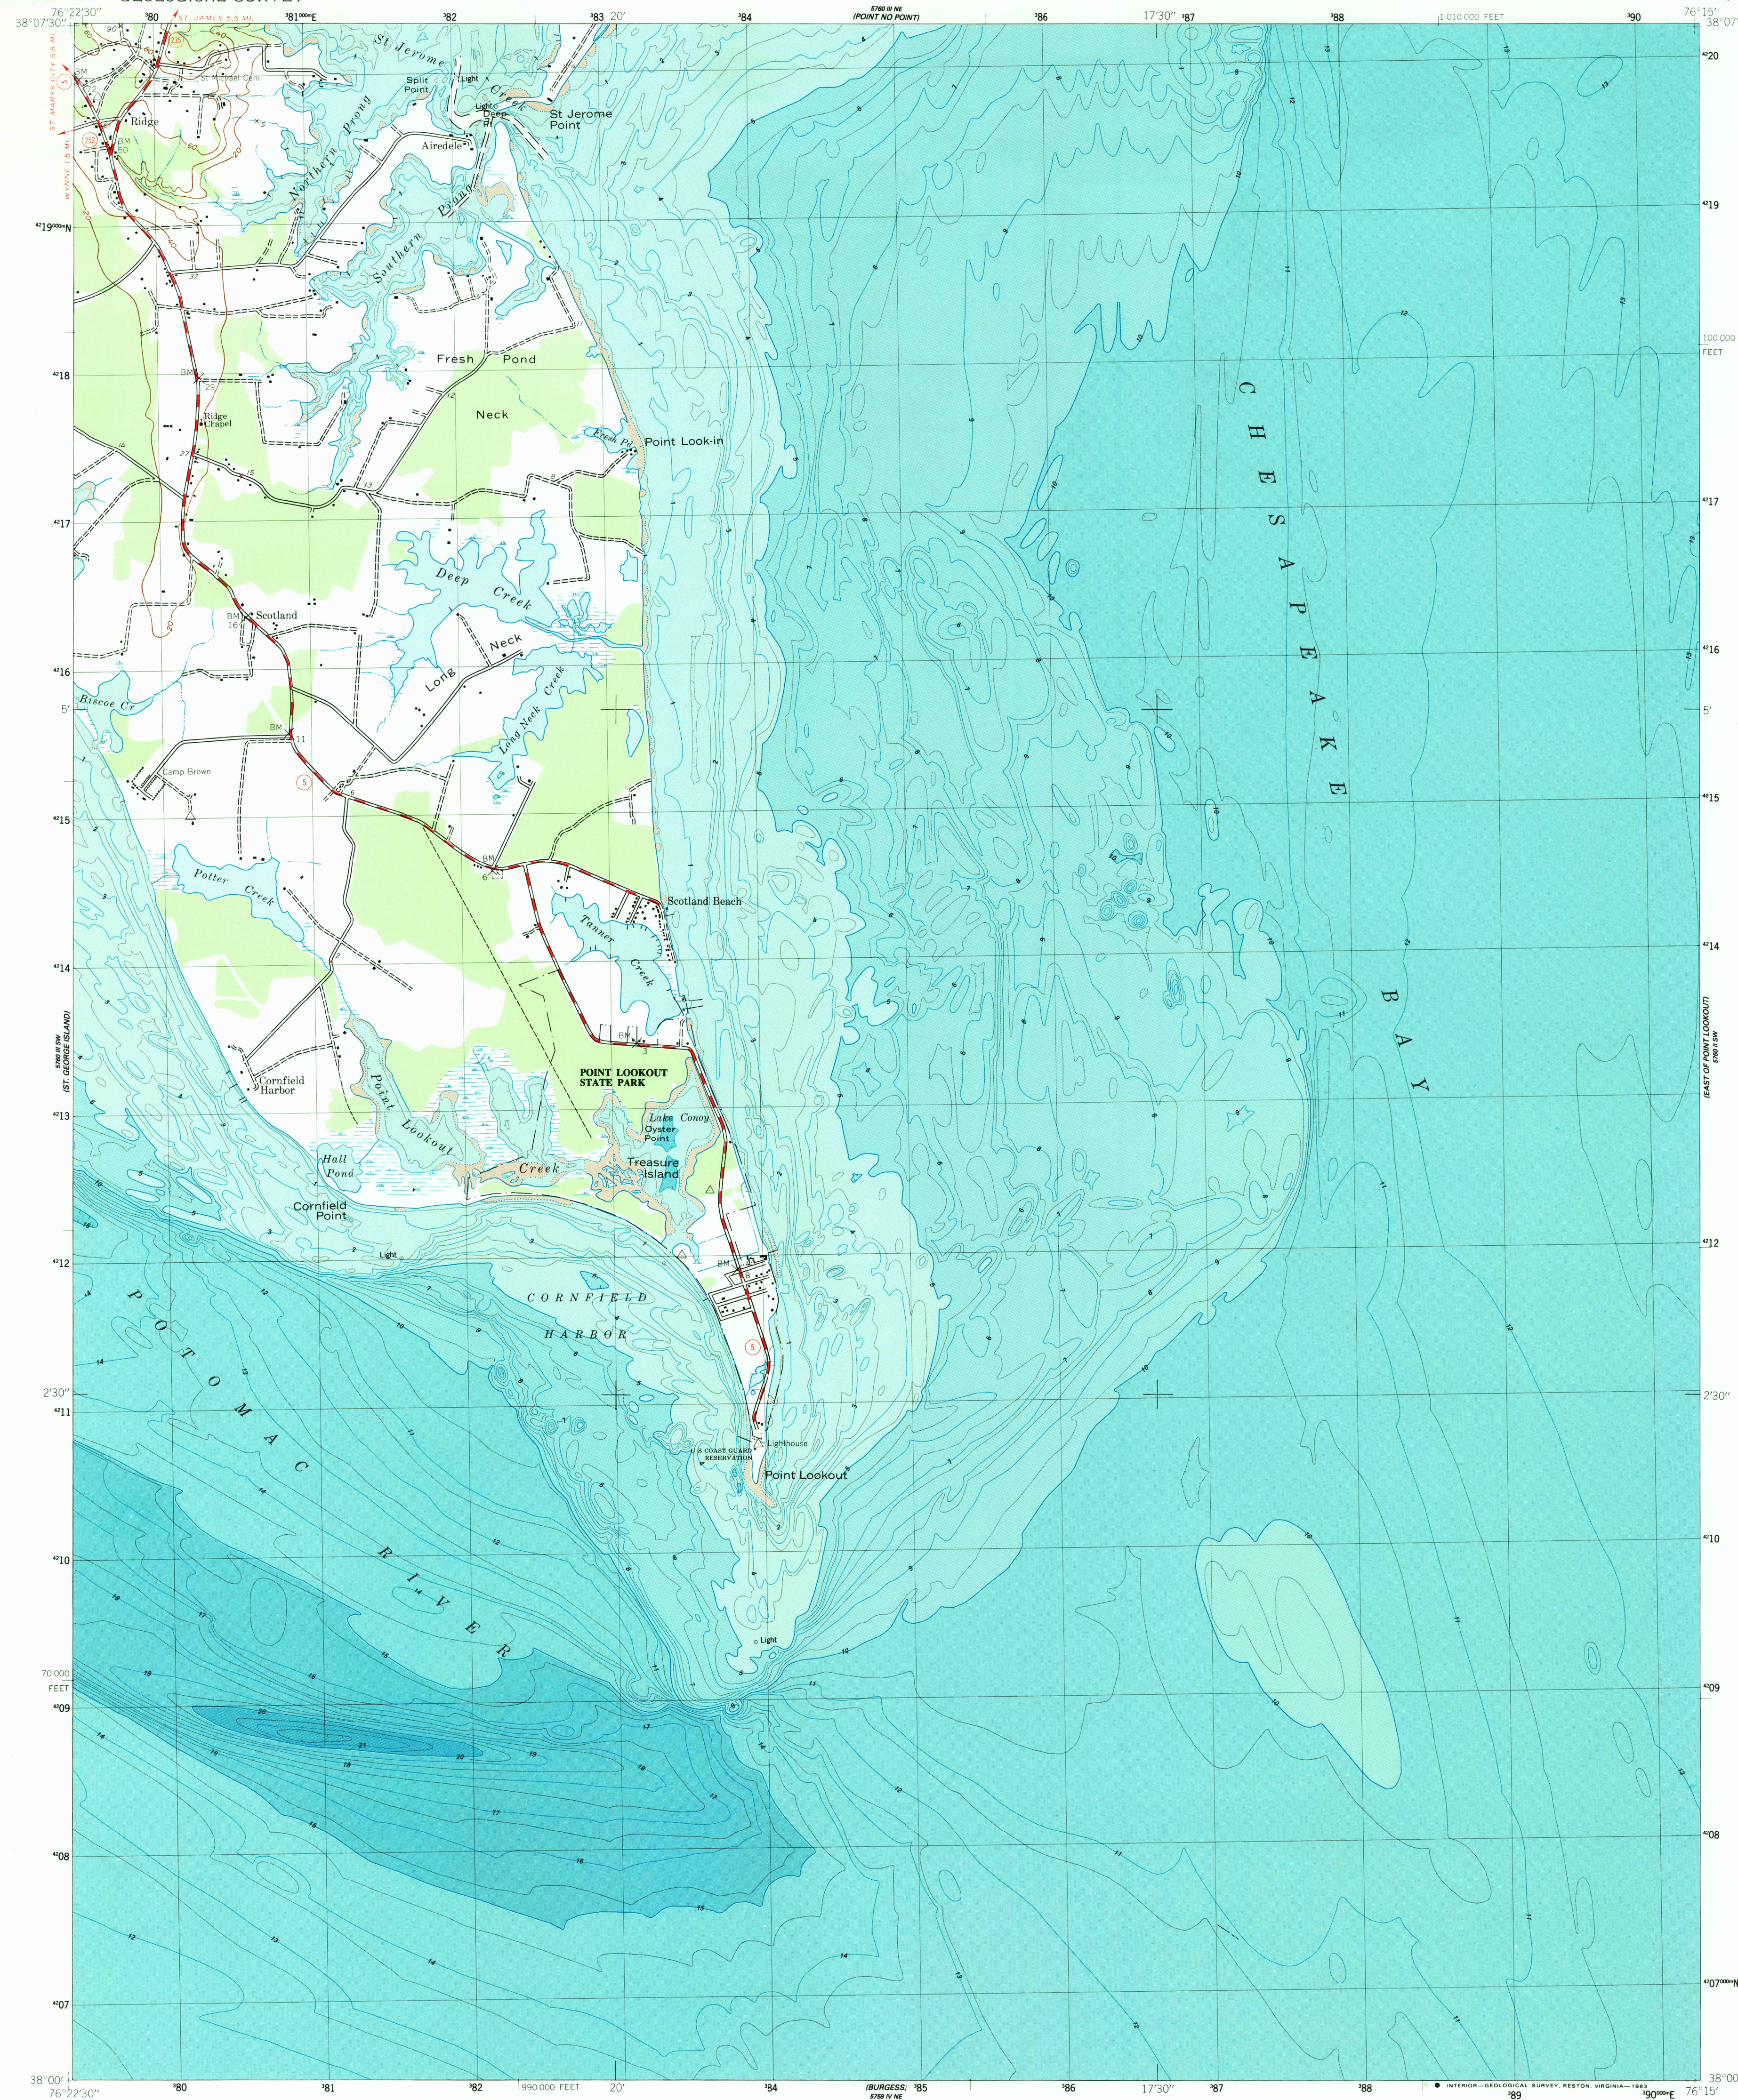


CONVERSION  
SCALES




Feet	Meters
1	3048
2	6096
3	9144
4	12192
5	15240
6	18288
7	21336
8	24384
9	27432
10	30480

To convert feet to meters  
multiply by 3048  
To convert meters to feet  
multiply by 3.2808

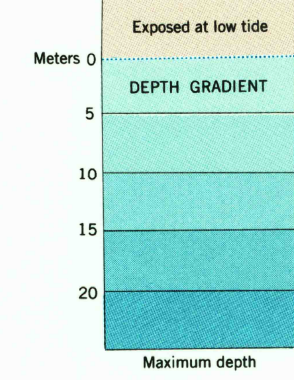


Maped by the Defense Mapping Agency  
Edited and published by the Geological Survey  
and the National Ocean Survey  
Control by NOS/NOAA  
Topography from aerial photographs by photogrammetric  
methods and by planetable surveys 1942. Aerial photographs  
taken 1942  
Bathymetry compiled by the National Ocean Survey from tide-  
coordinated hydrographic surveys. This information is not  
intended for navigational purposes  
Mean low water (dotted) line and mean high water (heavy solid)  
line compiled by NOS from tide-coordinated aerial photographs  
Apparent shoreline (outer edge of vegetation) shown by light  
solid line  
Polyconic projection. 10,000-foot grid ticks based on  
Maryland coordinate system  
1000-meter Universal Transverse Mercator grid, zone 18  
1927 North American Datum  
To place on the predicted North American Datum 1983 move  
the projection lines 9 meters south and 29 meters west as  
shown by dashed corner ticks  
There may be private inholdings within the boundaries of the  
National or State reservations shown on this map

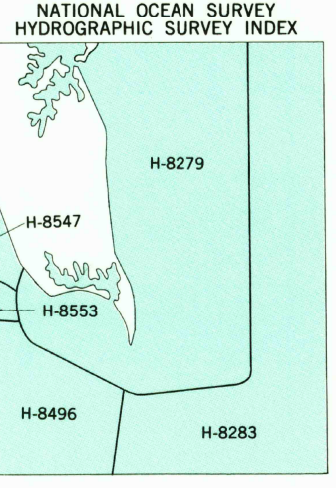

Survey Number	Survey Date	Survey Scale	Survey Line Spacing (Naut. Miles)
H-8279	1955-59	1:10,000	0.3-2.0
H-8283	1955-56	1:20,000	0.3-2.3
H-8496	1959	1:20,000	0.3-1.0
H-8547	1959-60	1:10,000	0.3-1.0
H-8553	1960	1:20,000	0.3-2.0

SCALE 1:24,000  
CONTOUR INTERVAL 20 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
BATHYMETRIC CONTOUR INTERVAL 1 METER WITH SUPPLEMENTARY  
0.5 METER CONTOURS-DATUM IS MEAN LOW WATER  
THE RELATIONSHIP BETWEEN THE TWO DATUMS IS VARIABLE  
THE MEAN RANGE OF TIDE IS APPROXIMATELY 0.4 METER  
BASE MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
BATHYMETRIC SURVEY DATA COMPLIES WITH INTERNATIONAL HYDROGRAPHIC  
ORGANIZATION (IHO) SPECIAL PUBLICATION 44 ACCURACY STANDARDS  
AND/OR STANDARDS USED AT THE DATE OF THE SURVEY  
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092  
AND NATIONAL OCEAN SURVEY, ROCKVILLE, MARYLAND 20852  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION  
Medium-duty ——— Light-duty ———  
Unimproved dirt ———  
State Route

POINT LOOKOUT, MD.  
38076-A3-TB-024  
1942  
BATHYMETRY ADDED 1982  
DMA 5760 III SE-SERIES V833

USGS AND HISTORICAL MAP  
REC'D FILE COPY