



U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

500 000
FEET

(NORTH POINT)


(MIDDLE POINT)

(ANNAPOLIS)

Mapped by the Army Map Service
Published for civil use by the Geological Survey
Control by USCGS, USGS, USCE, and USSCS
Topography by plane-table methods 1943
Photo-planimetric revision from aerial photographs 1947
Field check 1947

Polyconic projection. 1927 North American datum
10,000-foot grid based on Maryland coordinate system
Red tint indicates areas in which only
landmark buildings are shown

TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN
DECLINATION, 1947

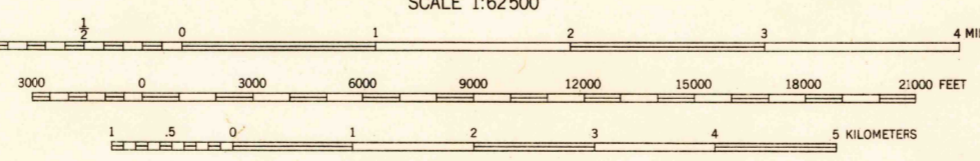

CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS MEAN LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF MEAN HIGH WATER
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 1 FOOT

USGS
Historical File
Topographic Division

ROAD CLASSIFICATION
Heavy-duty 4 LANE 6 LANE Light-duty
Medium-duty 2 LANE 6 LANE Unimproved dirt

U.S. Route State Route

RELAY, MD.
N 3900-W 7630/15
1947

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON, 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

NOV 3 1954
4815