

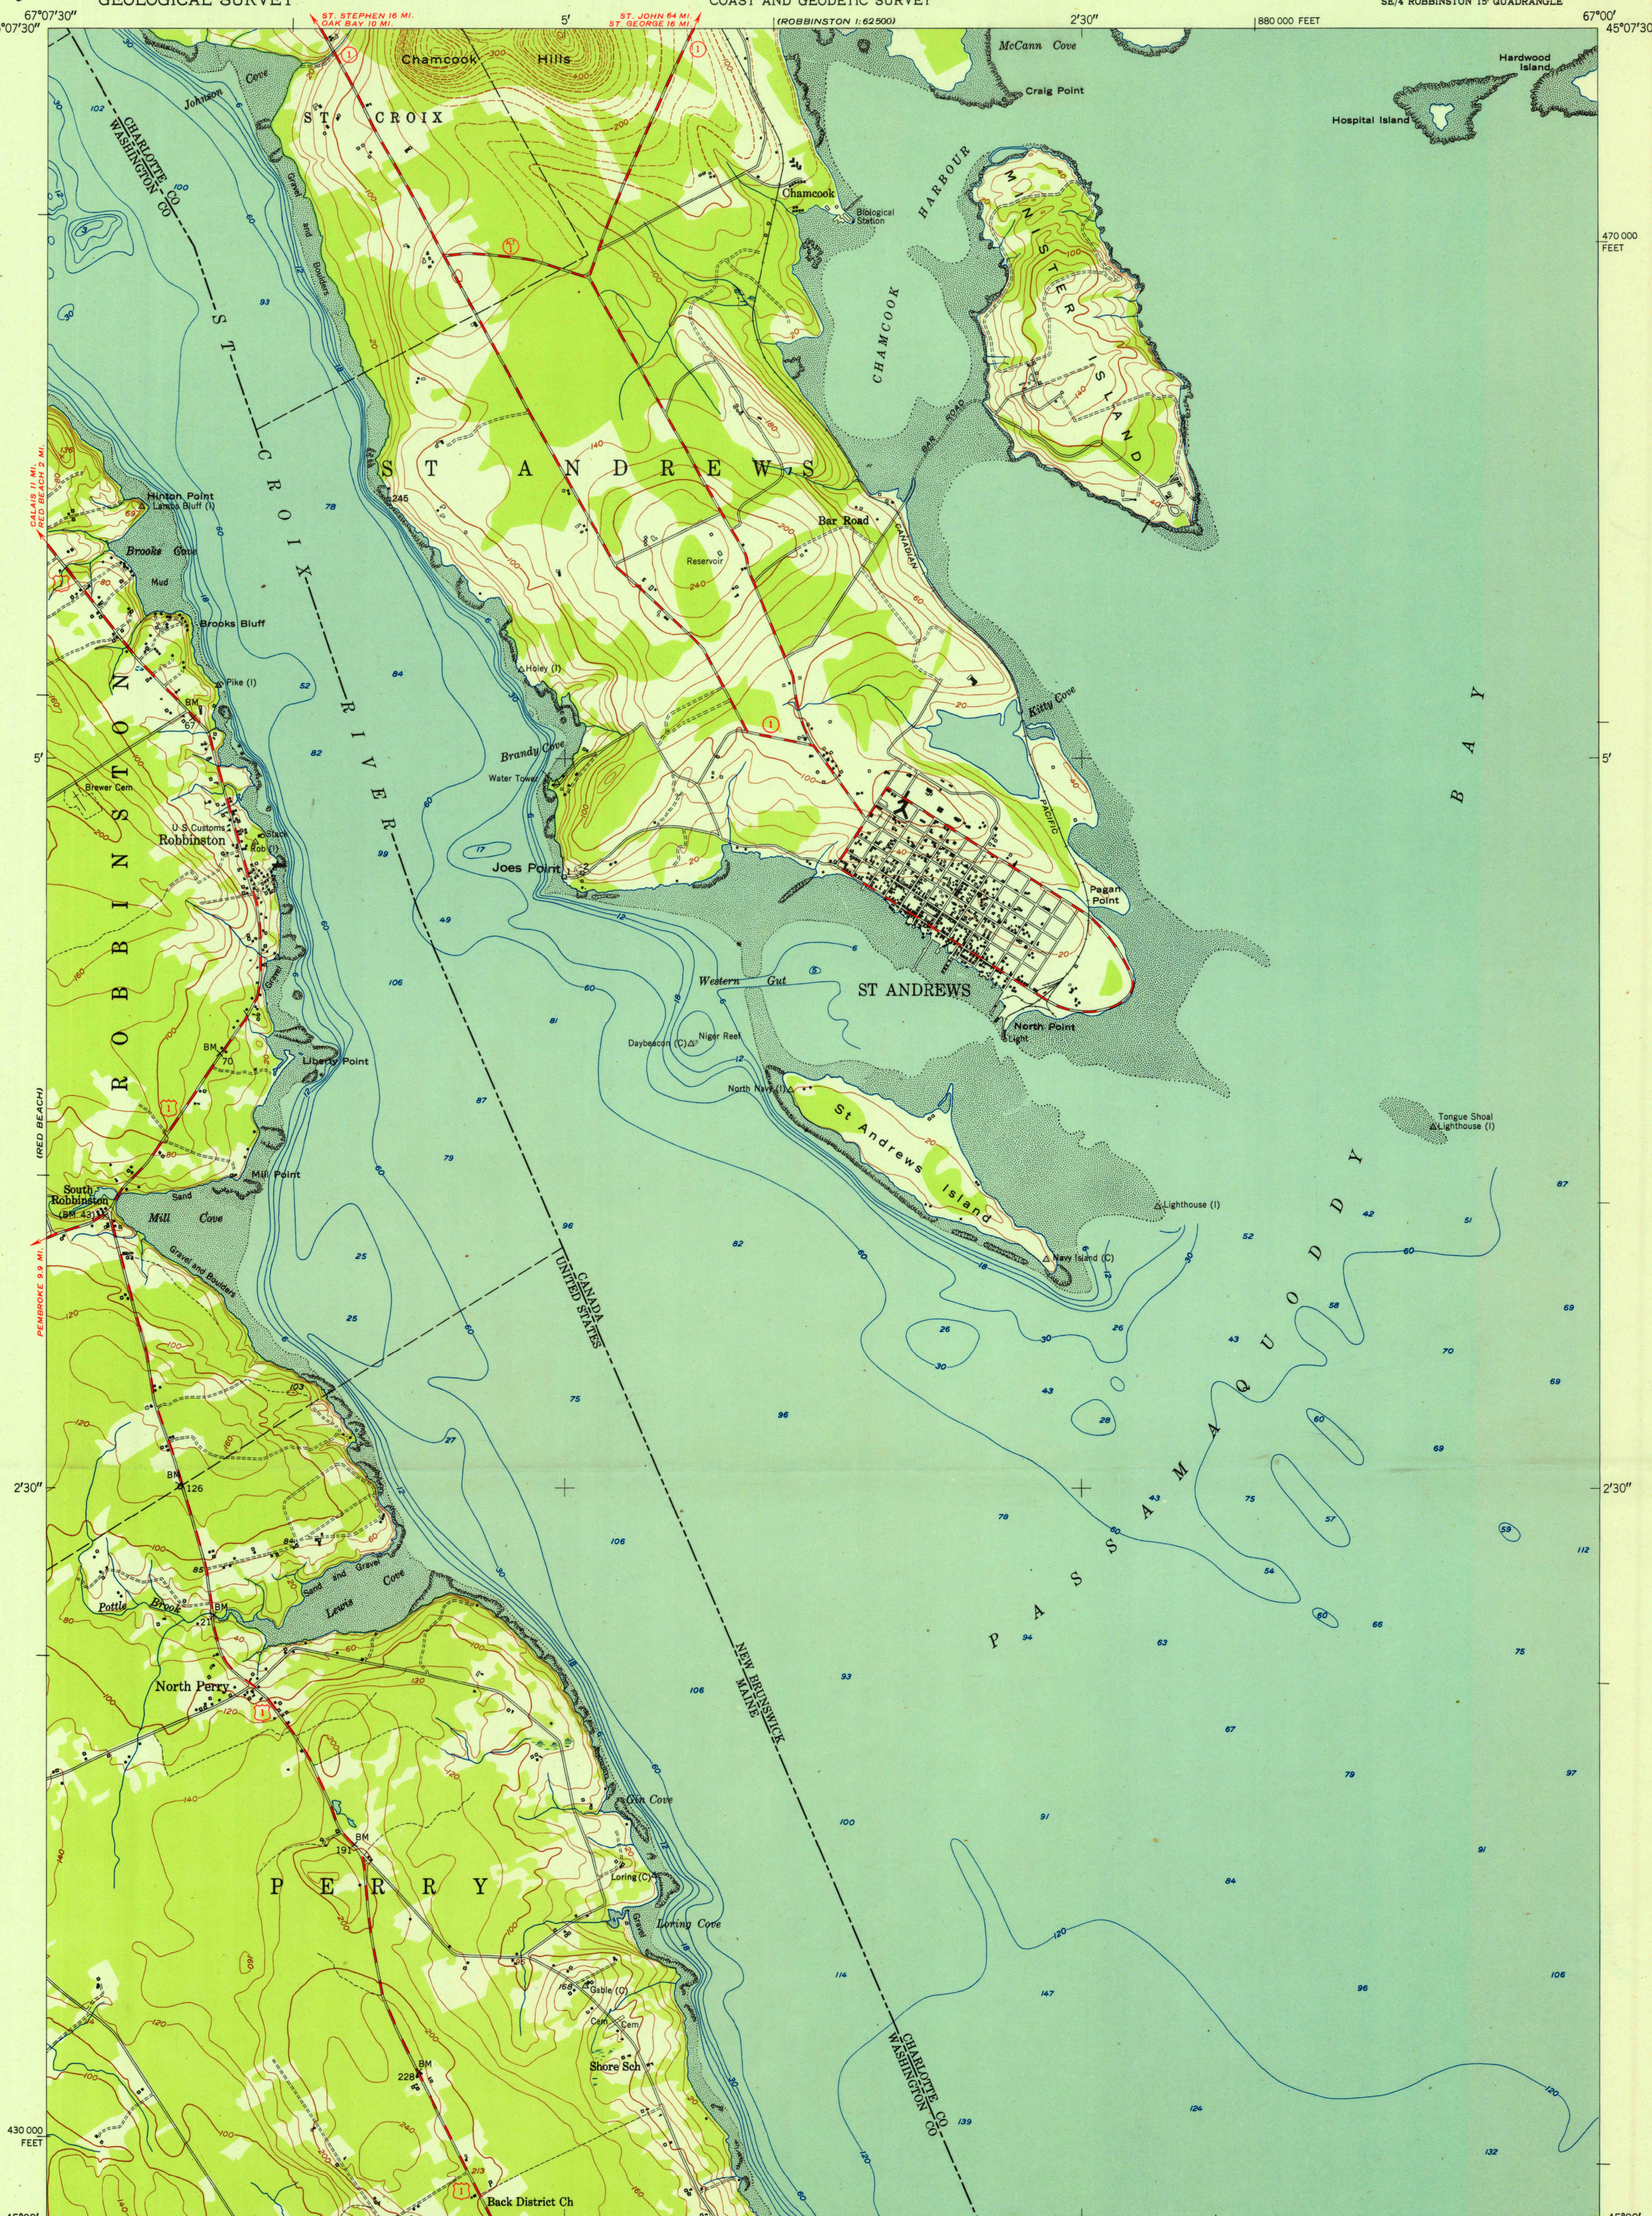


U. S. G. S.
FILE COPY
Inspection and Editing.

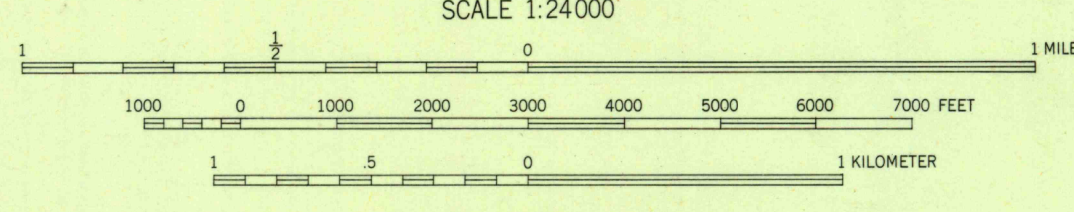

Mapped by the U. S. Coast & Geodetic Survey
Edited and published by the Geological Survey
Control by USC&GS (C), International Boundary Commission (I),
Geological Survey of Canada, and USGS
U. S. topography from aerial photographs by multiplex methods
Aerial photographs taken 1946. Field check 1949
Hydrography from surveys dated 1887, 1918, 1948, and 1949
Canadian topography from International Boundary Commission and
Canadian Department of Mines and Resources
Polyconic projection. 1927 North American datum
10,000-foot grid based on Maine coordinate system,
east zone



CONTOUR INTERVAL 20 FEET
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS MEAN LOW WATER
SHORELINE SHOWN REPRESENTS THE APPROXIMATE LINE OF HIGH WATER
THE AVERAGE RANGE OF TIDE IS APPROXIMATELY 19 FEET
THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty 4 LANE 16 LANE Light-duty
Medium-duty 4 LANE 16 LANE Unimproved dirt
U. S. Route State Route

ROBBINSON, ME.
SE/4 ROBBINSON 15' QUADRANGLE
N4500—W6700/7.5

1949

U. S. G. S.
FILE COPY
Inspection and Editing.