


Mapped, edited, and published by the Geological Survey
Control by USGS, USC&GS, and USCE
Culture and drainage in part compiled from aerial photographs
Topography by plane-table surveys 1937. Culture revised 1952
Hydrography from U.S. Lake Survey Chart 43 (1:40,000)
Canadian topography copied from Sarnia quadrangle
(1:63,360) 1909, revised 1936, Canadian
Department of National Defence
Polyconic projection. 1927 North American datum
10,000-foot grid based on Michigan coordinate system,
east zone
Red tint indicates areas in which only
landmark buildings are shown

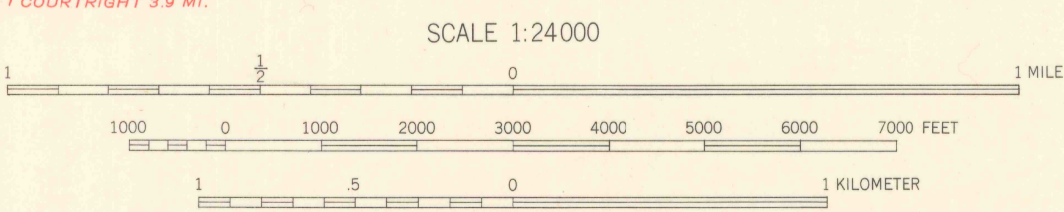

ROAD CLASSIFICATION

Heavy-duty	4 LANE 16 LANE	Light-duty	2 LANE 16 LANE
Medium-duty	4 LANE 16 LANE	Unimproved dirt	-----
	U.S. Route		State Route

CONTOUR INTERVAL 5 FEET
CONTOUR INTERVAL IN CANADIAN AREA 25 FEET
DATUM IS MEAN SEA LEVEL
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS RIVER SURFACE AT
FOLLOWING STAGES: LAKE HURON—578 AND LAKE ST. CLAIR—573
THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



PORT HURON, MICH.
N4252.5—W8222.5/7.5
1952

