


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SEBEWAING QUADRANGLE
MICHIGAN
7.5 MINUTE SERIES (TOPOGRAPHIC)

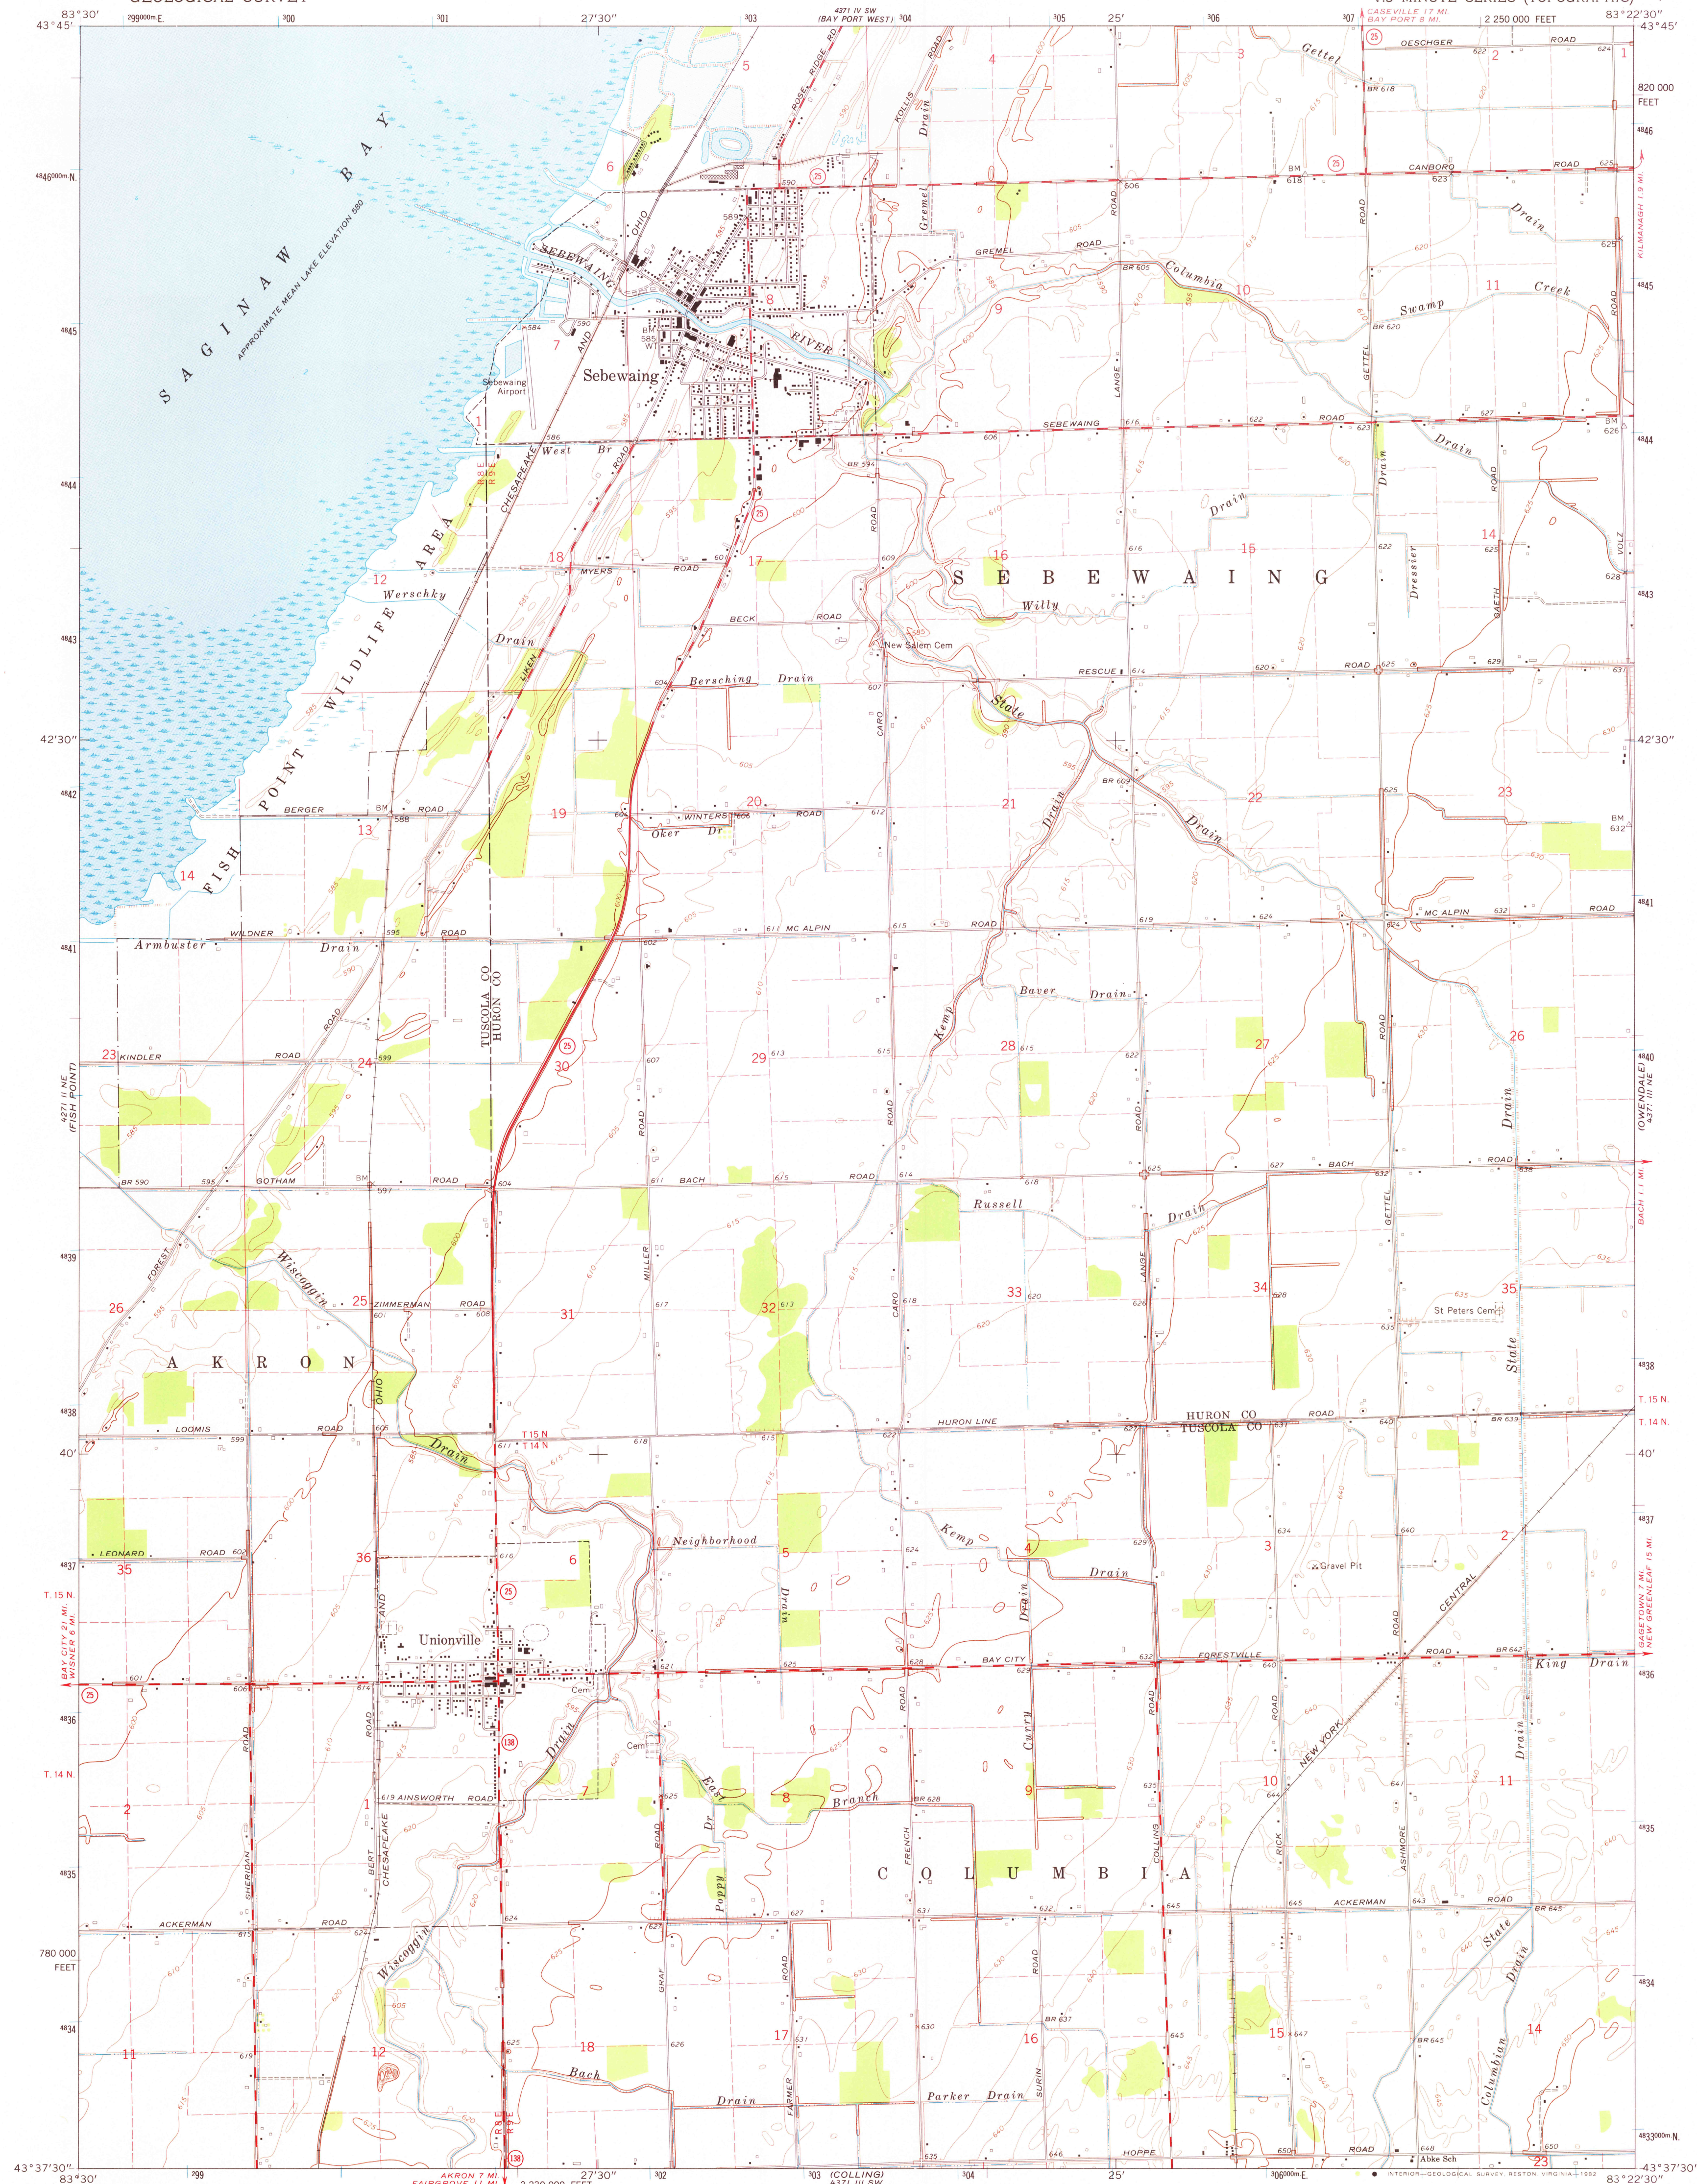

Mapped, edited, and published by the Geological Survey

Control by USGS, USC&GS, and U. S. Lake Survey

Planimetry by photogrammetric methods from aerial photographs taken 1959. Topography by planimetric surveys 1963

Selected hydrographic data compiled from U. S. Lake Survey Chart 52 (1961). This information is not intended for navigational purposes

Polyconic projection. 1927 North American Datum
10,000-foot grid based on Michigan coordinate system, south zone
1000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue

To place on the predicted North American Datum 1983
move the projection lines 1 meter north and
6 meters west as shown by dashed corner ticks

Map photoinspected 1978
No major culture or drainage changes observed

SCALE 1:24,000

CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
SOUNDINGS IN FEET—DATUM IS LOW WATER 578.5 FEET

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND BY THE GEOLOGICAL SURVEY DIVISION
MICHIGAN DEPARTMENT OF NATURAL RESOURCES, LANSING, MICHIGAN 48909
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Medium-duty ——— Unimproved dirt ———
○ State Route

SEBEWAING, MICH.
N4337.5—W8322.5/7.5

1963
PHOTOINSPECTED 1978
AMS 4371 III NW—SERIES V862

AUG 03 1982