



Mapped, edited, and published by the Geological Survey


Control by USGS, USC&GS, and USCE  
Culture and drainage in part compiled from aerial photographs  
Topography by plane-table surveys 1937. Culture revised 1952  
Hydrography from U.S. Lake Survey Chart 43 (1:40,000)  
Canadian topography copied from Sarnia quadrangle  
(1:63,360) 1909, revised 1936, Canadian  
Department of National Defence

Polyconic projection. 1927 North American datum  
10,000-foot grid based on Michigan coordinate system,  
east zone

Red tint indicates area in which only  
landmark buildings are shown

APPROXIMATE MEAN  
MAGNETIC DECLINATION,  
1952

SCALE 1:24,000

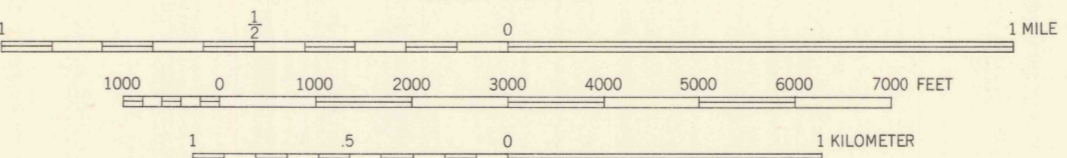


CONTOUR INTERVAL 5 FEET  
CONTOUR INTERVAL IN CANADIAN AREA 25 FEET  
DATUM IS MEAN SEA LEVEL  
DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS RIVER SURFACE AT  
FOLLOWING STAGES: LAKE HURON—578 AND LAKE ST. CLAIR—573

THE U. S. PORTION OF THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION  
Heavy-duty ——— 2 LANE 16 LANE Light-duty ———  
Medium-duty ——— 2 LANE 16 LANE Unimproved dirt - - - - -

U. S. Route      State Route

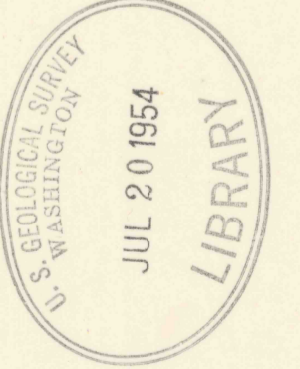

ST. CLAIR, MICH.  
N4245-W8222.5/7.5

1952