

V501, EDITION 1-AMS  
Prepared by the Army Survey Establishment, R.C.E., 1959-61.  
U.S. area from maps of the Army Map Service, Corps of Engineers, U.S. Army, Survey.

**LEGEND**  
ROAD DATA 1961

**POPULATED PLACES**

- Over 500,000
- 100,000 to 500,000
- 25,000 to 100,000
- 5,000 to 25,000
- 1,000 to 5,000
- Less than 1,000

**RAILROADS**

- Normal gauge
- Narrow gauge

**BOUNDARIES**

- International
- State
- County
- Park or reservation
- Horizontal control point
- Spot elevation in feet

**ROADS**

- Hard surface, all weather
- Hard surface, all weather
- Loose surface, all weather
- Loose surface, all weather; dry weather
- Cart track or trail

**LANDMARKS: School; Church; Other**

- Depth curve in feet
- Limit of danger: Reef
- Rocks: Awash; Sunken
- Foreshore flat
- Intermittent or dry stream
- Woods-brushwood
- Marsh or swamp

**3 LANES OR MORE**

**2 LANES 1 LANE**

**2 LANES OR MORE**

**1 LANE**

**LANDPLANE AIRPORT**


**SEAPLANE AIRPORT**

**SEAPLANE ANCHORAGE**

**POWER LINE**

**WOODS-BRUSHWOOD**

**MARSH OR SWAMP**

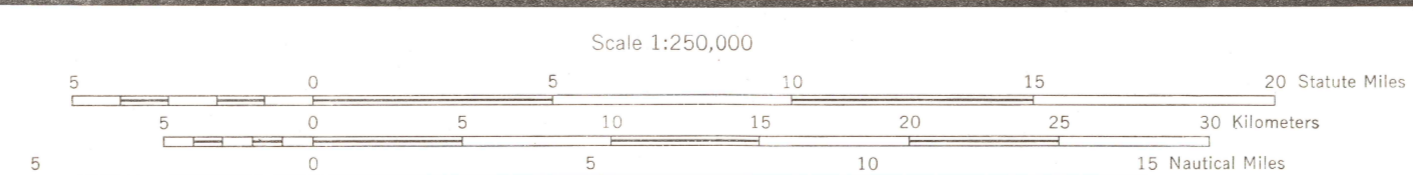

CONTOUR INTERVAL 50 FEET IN THE UNITED STATES AND 100 FEET IN CANADA

TRANSVERSE MERCATOR PROJECTION  
BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 17  
1985 MAGNETIC DECLINATION FROM TRUE NORTH FOR THIS SHEET VARIES FROM 45° (80 MILES) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 85° (120 MILES) WESTERLY FOR THE CENTER OF THE EAST EDGE  
REFER CORRECTIONS TO THIS MAP TO COMMANDING OFFICER, ARMY MAP SERVICE, WASHINGTON, D.C. 20315



United States  
Sheet BL  
Cp. 1.

SX 4-68 PRINTED BY ARMY MAP SERVICE, CORPS OF ENGINEERS

GRID ZONE DESIGNATION	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS
17T	1. Read letters identifying 100,000 meter squares in which grid line
KC LC MC	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure showing the estimate (hundreds of meters) to point
KB LB MB	3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure (hundreds of meters) in the figure (right of point) nearest to point
KA LA MA	4. Add the two numbers and add the 100,000 meter grid interval to get the full coordinates. Use ONLY the LAST two figures of the grid number; example: 510000
17T1827E	5. If reporting bearing 18° in any direction, prefix Grid Zone Designation, as: 17T1827E