
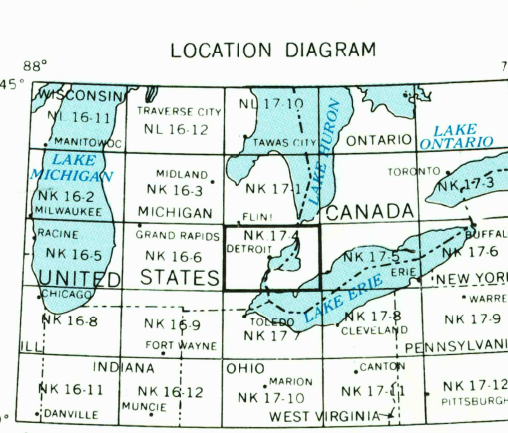
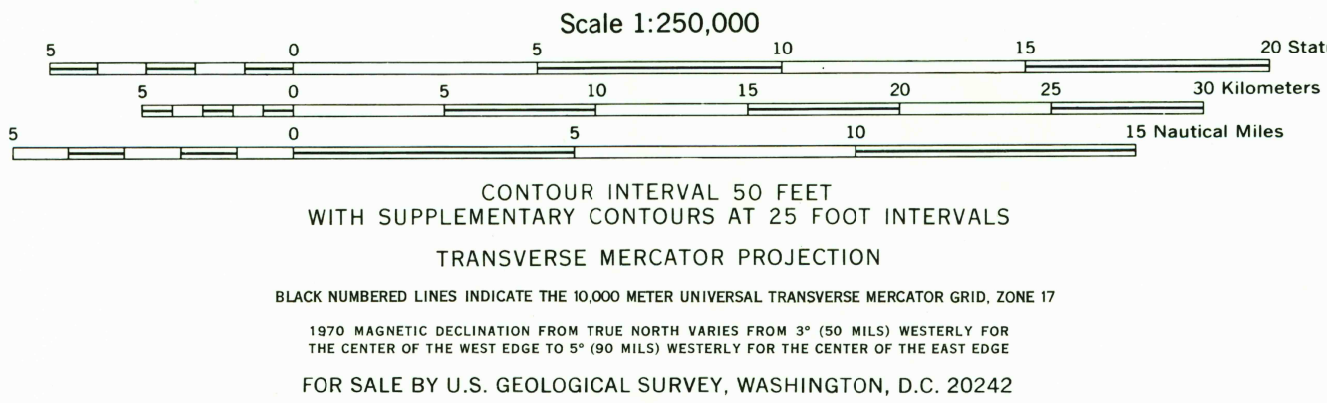


V501, EDITION 3

Prepared by the U.S. Army Topographic Command (KC), Washington, D.C. Compiled in 1961 by photogrammetric methods and from United States quadrangles, 1:24,000, 1:25,000, 1:31,680, and 1:50,000, 1940-54; and U.S. Lake Survey charts, 1955-56. Planimetry revised in part from aerial photographs taken 1956. Map field checked 1961. United States area revised by the U.S. Geological Survey 1970.

Selected hydrographic data compiled from U.S. Lake Survey charts. This information is not intended for navigational purposes.

Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

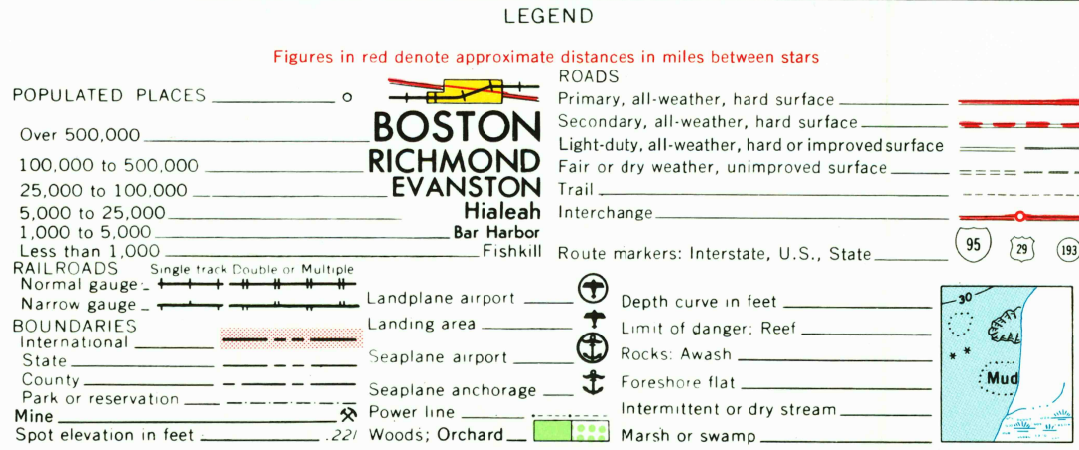

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID TONE DESIGNATION: 17T

10,000 M. SQUARE IDENTIFICATION

KT	LT	MT
KS	LS	MS

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: CADY

1. Read letters identifying 100,000 meter square in which the point lies.

2. Locate first VERTICAL and line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.

3. Estimate tenths from grid line to point: 2. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

4. Estimate tenths from grid line to point: 17.171717

5. Combine figures to give final grid reference: 17171717

DETROIT, MICH., U.S.; ONTARIO, CAN.

REVISED (U.S. AREA) 1970

STOCK NO. V501XNK174**03