



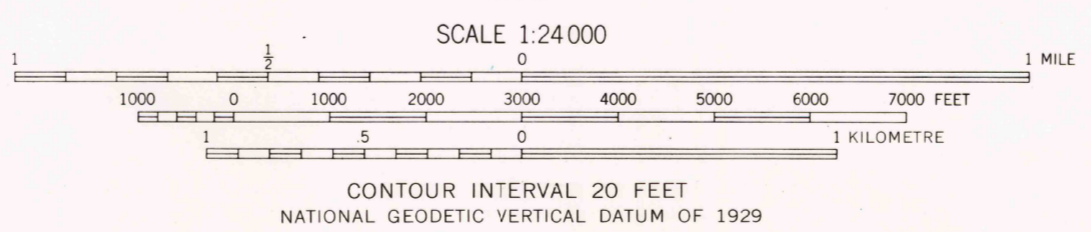

Control by USC&GS, USGS, and TVA
Topography by Geological Survey from aerial
photographs by stereophotogrammetric methods
Field examination by Tennessee Valley Authority, 1946

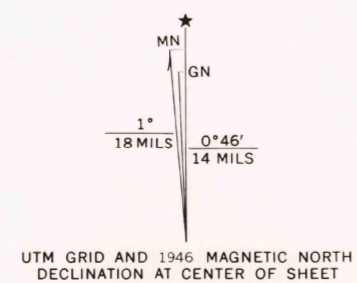

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
AND BY U.S. TENNESSEE VALLEY AUTHORITY,
CHATTANOOGA, TENN. 37401 OR KNOXVILLE, TENN. 37902
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



Polyconic projection, 1927 North American datum
10,000 foot grid based on North Carolina
rectangular coordinate system
1000-metre Universal Transverse Mercator grid ticks,
zone 17, shown in blue

ROUTES USUALLY TRAVELED
HARD IMPROVED SURFACE
OTHER SURFACE IMPROVEMENTS
U.S. ROUTE STATE ROUTE

USGS
Historical File
Topographic Division

CLIFFFIELD MTN., N.C.
202-SE
N3515-W8215/7.5
1946
AMS 4554 IV SE-SERIES V842

JUN 16 1976