
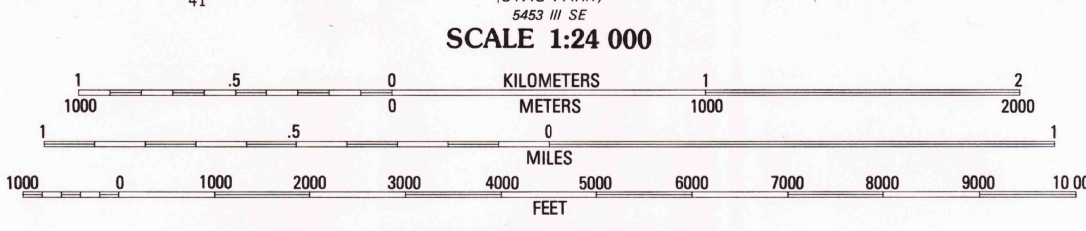


CONVERSION SCALES

Feet	Meters
0	0
100	30.48
200	60.96
300	91.44
400	121.92
500	152.40
600	182.88
700	213.36
800	243.84
900	274.32
1000	304.80

To convert feet to meters multiply by .3048
To convert meters to feet multiply by 3.2808

Maped, edited, and published by the Geological Survey
Control by USGS, NOS/NOAA, and North Carolina Geodetic Survey
Topography by photogrammetric methods from aerial photographs taken 1977. Field checked 1979. Map edited 1981
Projection and 10,000-foot grid ticks: North Carolina coordinate system (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 18 1927 North American Datum
To place on the predicted North American Datum 1983 move the projection lines 13 meters south and 26 meters west as shown by dashed corner ticks
Short dashed blue lines indicate elliptical bay outlines visible on aerial photographs
There may be private inholdings within the boundaries of the National or State reservations shown on this map



CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

ROAD CLASSIFICATION

Primary highway, hard surface	Light-duty road, hard or improved surface
Secondary highway, hard surface	Unimproved road
Interstate Route	U. S. Route
	State Route

QUADRANGLE LOCATION
CONTOURS AND ELEVATIONS IN METERS

PIN HOOK, N. C.
NE/4 BURGAW 15' QUADRANGLE
N3437.5-W7745/7.5

1981

DMA 5453 III NE-SERIES V842