

Produced by the United States Geological Survey in cooperation with the North Carolina Department of Environment and Natural Resources



Derived from imagery taken 1979 and other sources. Photoinspected using imagery taken 2002; no major culture or drainage changes observed. Survey control current as of 1980

Boundaries, other than corporate, verified 2003


North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: North Carolina coordinate system (Lambert conformal conic)

1000-meter Universal Transverse Mercator grid, zone 17S

North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software

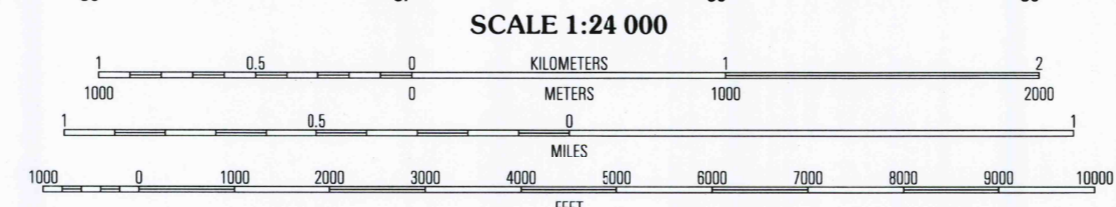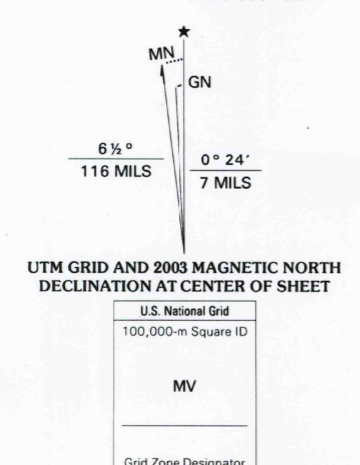

CONTOUR INTERVAL 20 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
(TO CONVERT ELEVATIONS TO THE NORTH AMERICAN VERTICAL DATUM OF 1988, SUBTRACT 1 FOOT)
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048



1	2	3	1 Dyanville
			2 Benn Knob
			3 Casar
4		5	4 Sunshine
			5 Lawndale
			6 Forest City
			7 Bolling Springs North
6	7	8	8 Shelby

ADJOINING 7.5 QUADRANGLES

ROAD CLASSIFICATION

Primary highway
hard surface
Secondary highway
hard surface

Light-duty road, hard or
improved surface

Unimproved road

Interstate Route U.S. Route State Route

JUL 14 2003

POLKVILLE, NC
2002

NIMA 4654 1 NW-SERIES V842

RECEIVED
AUG 29 2003
HISTORICAL MAP ARCHIVES
3 1818 00417535 0
020206109087 6
L-20206-709-0 NBS1