
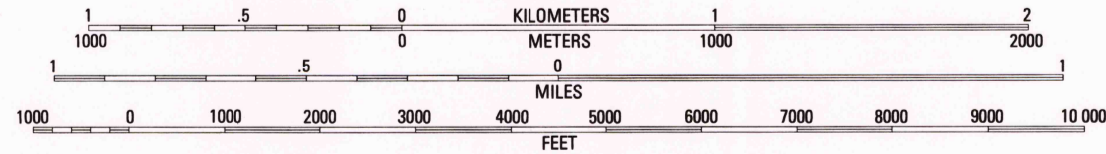


CONVERSION SCALES

Feet	Meters
0	0
100	30
200	60
300	90
400	120
500	150
600	180
700	210
800	240
900	270
1000	300
1500	450
2000	600
2500	750
3000	900
3500	1050
4000	1200
4500	1350
5000	1500
6000	1800
7000	2100
8000	2400
9000	2700
10000	3000
11000	3300
12000	3600
13000	3900
14000	4200
15000	4500

To convert feet to meters multiply by 3048
To convert meters to feet multiply by 3.2808

Mapped, edited, and published by the Geological Survey
Control by USGS and NOS/NOAA
Topography by photogrammetric methods from aerial photographs taken 1975. Field checked 1976. Map edited 1982
Projection and 10,000-foot grid ticks: North Carolina coordinate system (Lambert conformal conic)
1000-meter Universal Transverse Mercator grid, zone 18
1927 North American Datum
To place on the predicted North American Datum 1983 move the projection lines 12 meters south and 28 meters west as shown by dashed corner ticks

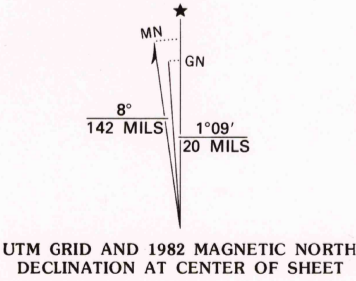

CONTOUR INTERVAL 2 METERS
SUPPLEMENTARY CONTOUR INTERVAL 1 METER
DASHED SUPPLEMENTARY CONTOURS ARE APPROXIMATE
NATIONAL GEODETIC VERTICAL DATUM OF 1929
CONTROL ELEVATIONS SHOWN TO THE NEAREST 0.1 METER
OTHER ELEVATIONS SHOWN TO THE NEAREST 0.5 METER



ROAD CLASSIFICATION
Primary highway, hard surface Light-duty road, hard or improved surface
Secondary highway, hard surface Unimproved road
Interstate Route U. S. Route State Route

POWELLVILLE, N. C.
NW/4 COLERAIN 15' QUADRANGLE
N3607.5 - W7652.5/7.5
1982

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

RETURN TO: USGS AND HISTORICAL MAP ARCHIVES
DMA 5656 III NW-SERIES V842

DE-001982
1982