

V502, EDITION 3
 Prepared by the U.S. Army Topographic Command (KCSX), Washington, D.C. Compiled in 1956 by photogrammetric methods from aerial photographs taken 1953-54. Photographs first annotated 1955. Revised by the U.S. Geological Survey 1970.
 Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars.

POPULATED PLACES

Over 500,000
 100,000 to 500,000
 25,000 to 100,000
 5,000 to 25,000
 1,000 to 5,000
 Less than 1,000

ROADS

Primary, all-weather, hard surface
 Secondary, all-weather, hard surface
 Light-duty, all-weather, hard or improved surface
 Fair or dry weather, unimproved surface
 Trail
 Interchange

RAILROADS

Single track
 Double or Multiple
 Standard gauge
 Narrow gauge


BOUNDARIES

International
 State
 County
 Park or reservation

Landmarks: School; Church; Other

Spot elevation in feet
 Marsh or swamp
 Intermittent or dry stream
 Power line

Other symbols: Landplane airport, Landing area, Seaplane airport, Seaplane anchorage, Woods/brushwood

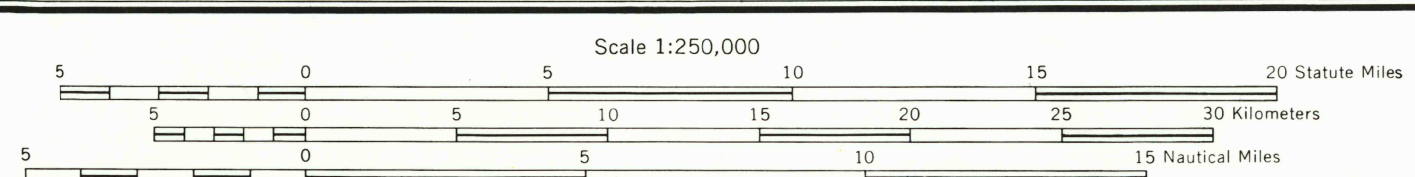

CONTOUR INTERVAL 200 FEET
 WITH SUPPLEMENTARY CONTOURS AT 100 FOOT INTERVALS
 TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 11
 1910 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 17°15' (30 MILES EAST) TO 17°00' (17 MILES WEST) EAST OF THE CENTER OF THE WEST EDGE TO 17°00' (17 MILES WEST) WEST OF THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20542

LOCATION DIAGRAM

OREGON	UTAH	IDAHO	NEVADA
NK 11-1	NK 11-2	NK 11-3	NK 11-4
NK 11-5	NK 11-6	NK 11-7	NK 11-8
NK 11-9	NK 11-10	NK 11-11	NK 11-12
NK 11-13	NK 11-14	NK 11-15	NK 11-16
NK 11-17	NK 11-18	NK 11-19	NK 11-20
NK 11-21	NK 11-22	NK 11-23	NK 11-24
NK 11-25	NK 11-26	NK 11-27	NK 11-28
NK 11-29	NK 11-30	NK 11-31	NK 11-32

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION: 11T

100,000 M. SQUARE IDENTIFICATION: NS PS QS NR PR QR

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS:

- Read letters identifying 100,000 meter square in which the point lies.
- Locate true vertical grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the line itself.
- Locate true horizontal grid line to point; point and read LARGE figure labeling the line either in the left or right margin, or on the line itself.

EXAMPLE: 450000

SCALE REFERENCE: 1:250,000

IF READING BEHIND LEFT OR RIGHT MARGIN, POINT OF GRID ZONE DESIGNATION, U.S. GEOLOGICAL SURVEY, WASHINGTON, D.C. 20542

WELLS, NEVADA; UTAH; IDAHO
 1955
 REVISED 1970

STOCK NO. V502NK119-03

DMA
 14000

FEB 22 1973

USGS
 HISTORICAL FILE
 TOPOGRAPHIC DIVISION