

U. S. Topography from aerial photographs by photogrammetric methods. Aerial photographs taken 1957. Field check 1958 Canadian topography from Canadian Department of National Defense maps (1937)

Hydrography compiled from U.S. Lake Survey chart 15 (1956)

231 MILS

0°21' 6 MILS

UTM GRID AND 1958 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

Polyconic projection. 1927 North American datum 10,000-foot grids based on New York coordinate system, east and central zones

1000-meter Universal Transverse Mercator grid ticks, zone 18, shown in blue


Fine red dashed lines indicate selected fence and field lines visible on aerial photographs. This information is unchecked

Unchecked elevations are shown in brown

CONTOUR INTERVAL 10 FEET IN THE UNITED STATES AND 25 FEET IN CANADA NATIONAL GEODETIC VERTICAL DATUM OF 1929 DEPTH CURVES AND SOUNDINGS IN FEET—DATUM IS LOW WATER 244 FEET

-

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092 A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

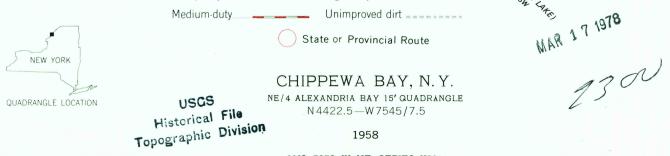

AMS 5872 IV NE-SERIES V821