

75°30' 44°52'30" 461 462 463 27'30" 464 465 466 467 25' 220 000 FEET 468 469 75°22'30" 44°52'30"

4680000 N.

467

466

465

50'

464

463

462

461

460

47°30'

459

458



1 740 000
FEET

457

456

44°45'

Mapped, edited, and published by the Geological Survey
Control by USC&GS, U. S. Lake Survey, TVA, and International
Boundary Commission
Topography by photogrammetric methods from aerial photographs
taken 1960. Field checked 1963
Selected hydrographic data compiled from U. S. Lake Survey
Chart 13 (1962). This information is not intended for
navigational purposes
Polyconic projection. 1927 North American datum
10,000-foot grid based on New York coordinate system, east zone
1000-meter Universal Transverse Mercator grid ticks,
zone 18, shown in blue
Fine red dashed lines indicate selected fence and field lines where
generally visible on aerial photographs. This information is unchecked

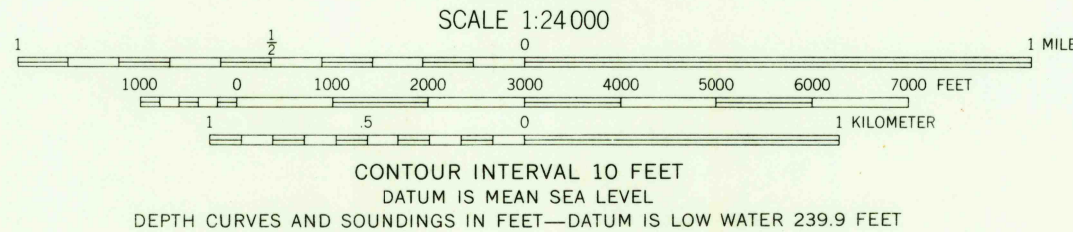

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U. S. GEOLOGICAL SURVEY, WASHINGTON 25, D. C.
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Heavy-duty ——— Light-duty ———
Unimproved dirt ———
State Route

RED MILLS, N. Y.
SW/4 RED MILLS 15' QUADRANGLE
N4445—W7522.5/7.5

1963
AMS 5973 IV SW—SERIES V821

U.S.G.S.
FILE COPY
TOPOGRAPHIC DIVISION

JAN 1 51965
2740