




Produced by the United States Geological Survey  
Topography compiled 1960. Planimetry derived from imagery taken 1976. Photomaps using imagery dated 1994, no major culture or drainage changes observed. Survey control current as of 1961. Boundaries, other than corporate, revised 1997.  
North American Datum of 1927 (NAD 27). Projection and 10 000-foot ticks: Ohio coordinate system, south zone (Lambert conformal conic).  
1000-meter Universal Transverse Mercator grid, zone 17  
North American Datum of 1983 (NAD 83) is shown by dashed corner ticks. The values of the shift between NAD 27 and NAD 83 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.  
Area covered by dashed light-blue pattern is subject to controlled inundation.  
There may be private inholdings within the boundaries of the National or State reservations shown on this map.  
Land lines based on the Ohio River Base.  
Information shown in purple may not meet USGS content standards and may conflict with previously mapped contours.



SCALE 1:24 000  
CONTOUR INTERVAL 20 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929  
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

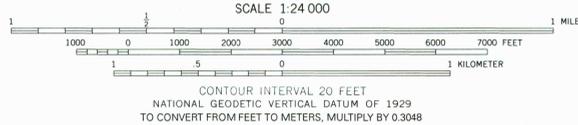

ROAD CLASSIFICATION  
Primary highway, hard surface ——— Light-duty road, hard or improved surface ———  
Secondary highway, hard surface ——— Unimproved road ———  
○ Interstate Route ○ U. S. Route ○ State Route



THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

SUMMERFIELD, OHIO  
1994  
NIMA 4763 IV SE—SERIES V852

